


The TA235CSL is host to many significant features, including aluminium guards and base and laser sighting. Location holes allow easy and rapid fitment to the bevel, and height micro adjustments enable fine tuning for maximum accuracy. A rack and pinion height adjustment system has also been introduced for fast, accurate adjustments when mounted upside down in the Workcentre. Laser sighting increases user safety, allows for faster set-up and improved accuracy. The flat motor end cap is a convenient feature, which allows the saw to be rested on the motor during blade change. Supplied with a premium quality 40 (HSS) blade for smooth and accurate cuts, the TA235CSL also comes with a fitted dust extraction port for a cleaner, safer working environment.

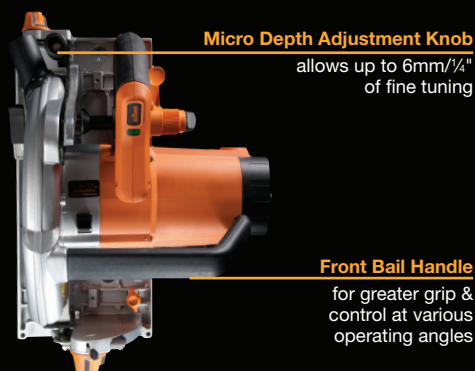

Rack & Pinion Height Adjustment
for rapid settings hand-held or when table-mounted

Easy Access Brushes
enables brushes to be changed quickly and easily

Flat Motor End Cap
allows saw to be rested on the motor for convenient blade changing

Adjustable Depth Cut
from 0 - 82mm/
0 - 3 15/64" at 90° enables cutting of thick material

Power Neon-On
increases operator safety

LASER
Laser Line Generator
for increased accuracy, safety & maximum productivity



Selling Points

- Rack & pinion height adjustment system
- Laser line generator for increased safety, faster set-up & improved accuracy
- Micro depth adjustment allows up to 6mm of fine tuning
- Positive bevel stops with front & rear pivot lock for maximum stability
- Adjustable cutting depth from 0-82mm / 0-3 15/64" at 90° enables cutting of thick material
- Flat motor end cap allows saw to be rested on motor for convenient blade change
- Front bail handle allows greater grip & control

What's in the Box

- 40 HSS Blade
- Hex Key
- Parallel Guide
- Long Lower Guard Wrench

Key Specifications

	Voltage	
	220-240V	120V 60Hz
Power	2300W	3.2hp
No Load Speed	4500rpm	
Blade Diameter	235mm	9 1/4"
Blade Teeth	40 HSS	
Bevel Range	0 - 45°	
Cutting Depth	0° - 82mm 45° - 60mm	0° - 3 15/64" 45° - 2 3/8"
Positive Bevel Stops	0°, 15°, 22.5°, 30° & 45°	
Weight	7.7kg	17lbs