



# 30W COB LED RECHARGABLE PORTABLE FLOODLIGHT AND POWER BANK

MODEL NO: **LED3000**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.



**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.

## 1. SAFETY

### 1.1. GENERAL

- ✓ Use this light only as it is intended.
- ✓ Inspect before every use.
- ✓ Keep away from infants and toddlers as this product contains small parts.
- ✓ Protect this product from water, humidity or any liquids.
- ✗ **DO NOT** stare into the light, shine light into eyes or focus the beam using an additional lens.
- ✗ **DO NOT** use the light if you suspect that the battery or product casing is damaged.
- ✗ **DO NOT** attempt to repair/disassemble the light yourself.
- ✗ **DO NOT** leave batteries in a discharged state. Before storage remove batteries.
- ✗ **DO NOT** use/store the product in extreme temperatures.

### 1.2. BATTERY SAFETY

- **WARNING!** This product contains a non-replaceable rechargeable lithium battery. Attempting to open the product or replacing the rechargeable battery will result in permanent damage and void all warranties.
- **WARNING!** To reduce the risk of burns or fire:
  - ✗ **DO NOT** attempt to open the batteries.
  - ✗ **DO NOT** crush, puncture, short contacts or dispose of in fire or water.
  - ✗ **DO NOT** expose to temperatures above 60°C (140°F).
  - ✓ Recycle or dispose of used batteries as stipulated by local regulation.
  - ✓ If the electrolyte in the batteries gets on your skin, rinse thoroughly with water. If it gets in your eyes, rinse thoroughly with cool water and seek immediate medical attention.

## 2. INTRODUCTION

30W COB LED Compact portable floodlight. 3 modes of light ranging from 300-3000lm. Rechargeable high quality 3.7V battery. 180° curve for a wide spread of light. Adjustable stand for positioning of light. Supplied with 50cm Type-C USB Charging cable. Charging time 8.5 Hours. Water and Impact resistant. Power bank output 5V=1A.

## 3. SPECIFICATION

MODEL NO:	LED3000
Battery:	3.7V 4Ah (x2)
Charging Time:	8.5hrs
IP Rating:	IPX6
LED Type:	COB
Lumen Output:	3000lm
Operating Time:	Mode 1- 1hr 40 mins Mode 2- 3 Hr 40 mins Mode 3 - 7hr 30 mins
Power:	30W
USB Output:	5V=1A

## 4. OPERATION

### 4.1. CHARGING (FIG.2)

This product is rechargeable. Please charge fully before first use to ensure optimal performance. Pull up the rubber port cover on the back of the light. Connect the USB-A into a USB power source such as a power cube, computer or car adapter and the USB-C plug into the charging port. A green four step charging indicator flashes. Charging is complete when all 4 lights turn solid green. **DO NOT USE THE WORK LIGHT WHILE IT IS CHARGING!**

### 4.2. POWER BUTTON (FIG.2)

Repeatedly pressing the power button cycles between high, medium and low brightness settings, plus off.

FIG.1


KICKSTAND



FIG.2

POWER  
BUTTON

USB  
PORT

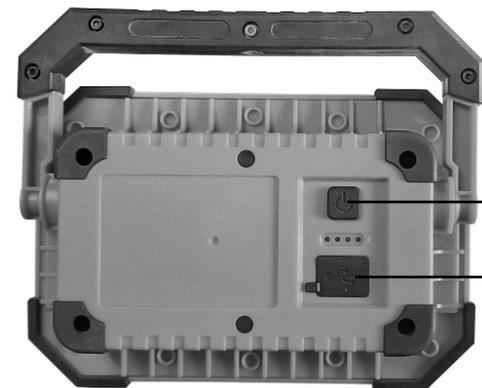

#### 4.3. KICKSTAND (FIG.1)

The kickstand locks in 6 positions and may also be used as a carry handle.

#### 4.4. CHARGING A SMARTPHONE (FIG.2)

Pull up the rubber port cover. Using your own phone charging cable, connect the full sized USB plug into the flashlight's USB power bank port. Connect the other end to your device. **NOTE:** Charging a smartphone reduces the overall runtime of the work light. Replace the port cover when finished.

### 5. MAINTENANCE

- ✓ Clean this product with a soft, slightly damp cloth.
- ✗ **DO NOT** use any abrasive agents to clean the product.
- ✗ **DO NOT** attempt to repair/disassemble the light yourself.



#### ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR PURCHASE HERE



#### WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.



#### BATTERY REMOVAL

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme. Jack Sealey Ltd Batteries Producer Registration Number (BPRN) is BPRN00705.

**Note:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**Important:** No Liability is accepted for incorrect use of this product.

**Warranty:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



sales@sealey.co.uk



www.sealey.co.uk