

LED Wired Non-Corrosive

Fittings

Installation Instructions p.1

For models: WF18B-1, WF218B-1, WF36B-2, WF236B-1, WF58B-1, WF258B-1, WF70B-1, WF270B-1



This installation must be carried out by a qualified electrician.

Please read these instructions carefully before installation.

Leave a copy for the user/maintenance engineer for future reference.

Specification

- LED Wired Non-Corrosive Lighting
- 240V 50Hz
- Available in 2ft, 4ft, 5ft & 6ft
- 1 Year guarantee
- IP65
- No ballast
- Wired live and neutral to one end as standard. Simply remove the fuse on the circuits to convert to 'wired both ends.'
- IMPORTANT: Ensure that ALL electrical connections are tight with no loose strands, including factory made connections.
- Ensure all clips are fully seated and cable entries are sealed.
- IMPORTANT: Ensure that ALL electrical connections are tight with no loose strands, including factory made connections.
- DO NOT install this luminaire into new plaster or damp areas.

Important User Information

- Always switch off mains supply before servicing, fitting or changing lamp.
- This fitting must be earthed.
- IP65 rated luminaires are protected against dust and jets of water. It is suitable for installation in locations containing a bath or shower as defined by the I.E.E wiring regulations, zones 1, 2 & 3 where water jets are likely.

Maintenance

- Regular cleaning of the luminaire, especially diffusers, are recommended to ensure maximum efficiency.
- In the case of lamp failure, switch off luminaire and replace lamp with correct replacement.
- Please ensure the lamp is carefully disposed of in line with WEEE Directive Regulations.

Installation Instructions

- These luminaires are for indoor and outdoor use.
- DO NOT DRILL THE BODY FOR MOUNTING PURPOSES OR OTHERWISE.
- The luminaire must be mounted using surface fixing clips.
- The fixing points are located on the mounting brackets.
- Raise the luminaire and insert supply cable through the cable entry gland(s) provided and secure the luminaire in position.
- Connect the supply cable to the terminal block as illustrated in Figure 1 (overleaf).
- Ensure all clips are fully seated and cable entries are sealed.








LED Wired Non-Corrosive Fittings



Installation Instructions p.2

For models: WF18B-1, WF218B-1, WF36B-2, WF236B-1, WF58B-1, WF258B-1, WF70B-1, WF270B-1

Installation Instructions Diagram

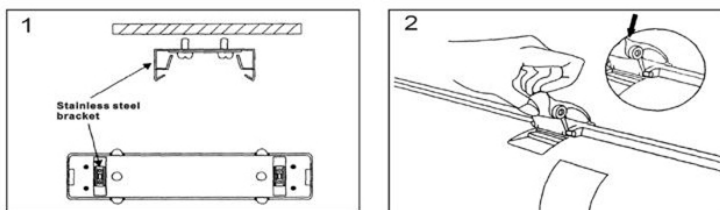

Wired live and neutral to one end as standard. Simply remove the fuse on the circuits to convert to 'wired both ends.'

Guarantee

This product is guaranteed for a period of 1 year from the date of purchase. The guarantee is invalid in the case of improper use, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the I.E.E. Wiring Regulations (BS7671). The guarantee is also invalidated if the luminaire has been Mega tested. Should this product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected. We reserve the right to alter specifications without prior notice.