

**SENCO**<sup>®</sup>MAKING HARD WORK  
**EASIER**

# GT40i-SCP

## Concrete nailer



### Applications

Fastening of drywall track, wood furring, hat channel, ceiling grid to concrete, concrete block and steel.


### Features & Benefits

- Cordless convenience – no hoses, no compressors, no hassles. Navigate the job site with no restrictions
- Powerful motor – 20,000V ignition gives you more power and cleaner combustion.
- Consistent drives in all weather conditions – performs optimally between -7° to 49°C
- No licensing required to operate
- 5 times faster than powder actuated systems
- Tool-free removable magazine for easy jam clearing
- Tool-free depth-of-drive adjustment
- Includes two Li-ion batteries, charger, carrying case, wrenches

### Technical specifications

Dimension (LxWxH)	327x130x385 mm
Net weight	3,8 kg
Firing mode	Restrictive
Operating temperature range	-7 - 49 °C
Sound pressure level (Lpa)	101,4 dB
Sound power level (Lwa)	104,1 dB
Vibration level	2,83 m/s <sup>2</sup>
Fastener driving power	90 J
Shots / second	2
Magazine capacity	20 pieces
Collation type 1	Plastic collated
Collation angle	0 °
Battery type	Li-Ion
Battery voltage	7,2 V
Battery ampere rating	2,5 Ah
Recharge time 100%	120 minutes
Shots per charge	8000
Number of batteries in kit	2 pieces
Length fuel cell	165 mm
Fuel cell type	40 gram
Shots per fuel cell	1200
Voltage (ac)	230 V
Frequency	50 Hz
Electrical plug type	UK

### Fastener specification

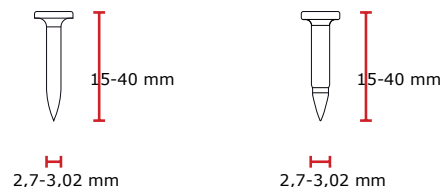

### Description

GT40i-SCP, UK concrete nailer

### Art. Nr.

15VS7001N

### EAN code

8715274246994