

Full round head framing nailer



Applications

Timber frame constructions, framing, sub-floors, pallets and crates, decking, roofs, fencing, door and windows frames


Features & Benefits

- Lightweight and powerful
- Adjustable depth of drive
- 360° adjustable exhaust
- Nose with sawtooth for more grip
- Comfort grip

Technical specifications

Dimension (LxWxH)	508x106x337 mm
Net weight	3,81 kg
Firing mode	Dual
Air inlet	3/8" female NPT
Operating pressure	4,8 - 8,3 bar
Air consumption (at 60 shots per minute)	283,2 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	97 dB
Sound power level (Lwa)	100 dB
Vibration level	3,5 m/s ²
Magazine capacity	60 pieces
Collation type 1	Plastic collated
Collation angle	17 °

Fastener specification

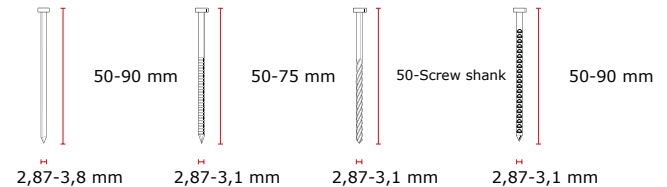

Description

FramePro602, FRH framing nailer, dual

Art. Nr.

1E2001N

EAN code

0741474305078