



Applications

Roofs, Decking, Cladding, Sub-flooring, Pallet and crates, Timber frame construction

Features & Benefits


- Selectable trigger
- Adjustable depth of drive
- Well balanced and lightweight
- Nose with saw tooth for more grip
- Guide body improvement for better nail guidance
- Upgraded safety, driver, magazine and nose piece

CoilPro90, coilnailer

Technical specifications

Dimension (LxWxH)	305x128x373 mm
Firing mode	Dual
Air inlet	3/8" female NPT
Operating pressure	4,8 - 8,3 bar
Air consumption (at 60 shots per minute)	157 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	98 dB
Sound power level (Lwa)	107 dB
Vibration level	7,13 m/s ²
Shots / second	3
Magazine capacity	300 pieces
Collation type 1	Wire collated
Collation type 2	Plastic collated 16mm
Collation angle	15 °

Fastener specification

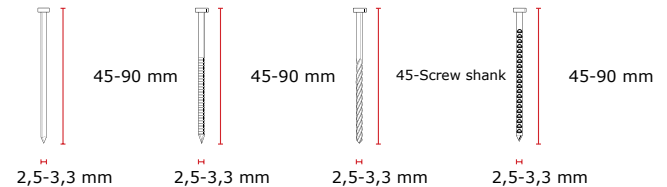

Description

CoilPro90, coilnailer, dual

Art. Nr.

1VS2001N

EAN code

8715274180755