

SENCO[®]MAKING HARD WORK
EASIER

Applications

Framing, truss building, subflooring, sheathing, decking, siding, fencing, and pallets and crate assembly

Features & Benefits


- Upgraded XtremePro internal features include: anodized sleeve for additional strength and durability
- Urethane sleeve cap protects sleeve from wear
- Fixed firing valve improves tool life and speed
- And positive stop guide body aligns nail and driver for consistent drive
- Comfort and convenience features include: overmold grip and trigger, 360 degree adjustable exhaust, rafter hanger and construction ruler
- Aggressive sawtooth safety that really digs in for toenailing
- Straight-line 34 degree magazine for better line of sight and simple two-step loading Last nail lockout, prevents dry firing

Clipped head framing nailer

Technical specifications

Dimension (LxWxH)	384x106x337 mm
Net weight	3,62 kg
Firing mode	Dual
Air inlet	3/8" female NPT
Operating pressure	4,8 - 8,3 bar
Air consumption (at 60 shots per minute)	283,2 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	96 dB
Sound power level (Lwa)	101 dB
Vibration level	4 m/s ²
Magazine capacity	70 pieces
Collation type 1	Paper collated
Collation angle	34 °

Fastener specification

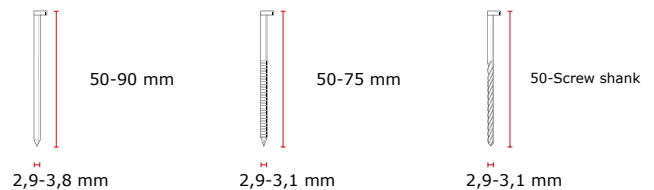

Description

SN90CXP, CH framing nailer, dual

Art. Nr.

2H2001N

EAN code

0741474305467