



Applications

For boxes and crates, carton-to-skid, decking, fencing, packaging, pallets and subflooring

Features & Benefits


- High load capacity to minimize production interruption
- Weighs just 2kg for ease of handling
- 360° adjustable exhaust
- Stretch comfort grip
- Easy-Load coilnailer canister reloads in seconds
- Adjustable depth of drive control for the precise countersink
- No mar pad to protect work surface
- Aluminum housing
- Switchable triggering system – either sequential or contact actuation

Coilnailer

Technical specifications

Dimension (LxWxH)	305x128x285 mm
Net weight	2 kg
Firing mode	Selectable
Air inlet	3/8" female NPT
Operating pressure	5 - 8 bar
Air consumption (at 60 shots per minute)	83,16 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	87 dB
Sound power level (Lwa)	100 dB
Vibration level	4,98 m/s ²
Shots / second	3
Magazine capacity	375 pieces
Collation type 1	Wire collated
Collation type 2	Plastic collated 16mm
Collation angle	15 °

Fastener specification

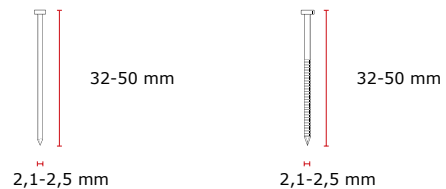

Description

CoilPro50, coilnailer, dual

Art. Nr.

4U2001N

EAN code

8718035007032