



## Applications

Wall sheathing/siding, packaging (boxes, crates), fencing, sub-flooring, boarding, and other wooden assembly work

## Features & Benefits


- Ergonomically magnesium housing designed with comfortable rubber grip
- Excellent power to weight ratio
- Multi-directional exhaust deflector
- Selectable trigger
- No mar pad to protect the work piece
- User friendly depth of drive adjustment
- High capacity easy to load magazine
- Belt hook
- Includes operator's manual and parts chart
- Very energy efficient

# Coilnailer

## Technical specifications

Dimension (LxWxH)	316x145x300 mm
Net weight	2,3 kg
Firing mode	Selectable
Air inlet	3/8" female NPT
Operating pressure	4,8 - 8,3 bar
Air consumption (at 60 shots per minute)	106 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	85,3 dB
Sound power level (Lwa)	98,3 dB
Vibration level	2,99 m/s <sup>2</sup>
Magazine capacity	300 pieces
Collation type 1	Plastic collated 16mm
Collation angle	0 °

## Fastener specification

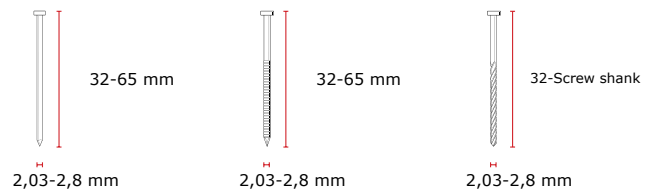

## Description

SCN650, coilnailer, dual

## Art. Nr.

7P2001N

## EAN code

8715274046501