
886T2 Facility Post

with Dual Line Webbing

Perfect for indoor and outdoor use. Features the heavy duty base with easy carry handles and dual line webbing for high visibility. Ideal for health and safety applications.

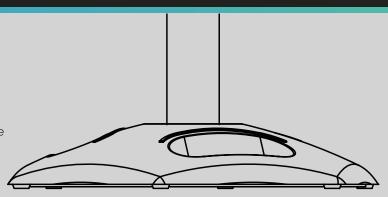

Features & Benefits

- The facility post features a lightweight plastic post that screw fixes into a recycled rubber heavy duty base.
- The dual line webbing ensures maximum control, security and safety as it prevents people from ducking underneath to pass through.
- The post and base can be quickly and easily dismantled for easy storage and transportation.
- The robust base can be walked or driven over and it will still retain its shape and function.
- Ideal for indoor and outdoor use, but shouldn't be permanently placed outside.
- The safest barrier on the market our cassettes have a unique braking system for slower webbing retraction.

Product Specification

- Plastic post available in 4 UV stable colours.
- Black recycled rubber base with easy carry handles, which allows for the post to be easily screwed into place.
- Shipped flat packed with no tools required.
- Available with any Tensator® standard (50mm) webbing options.
- Modular webbing cassette all cassettes come as standard with our four-point anti-tamper webbing connectivity. This allows you to connect other Tensabarrier® products to the receiver splines on the cassette head.
- Compatible with all Tensabarrier® accessories including our range of post
- Available to buy in a twin pack.

Applications

- Eliminate unsafe working conditions by clearly defining routes.
- Restrict access to dangerous areas.
- Use to identify hazards before they cause harm.
- Ideal for warehouses, industrial and maintenance areas.
- Indoor and outdoor use.



Order Code

886T2-STD - Single Pack - Facility Post with Dual Line Webbing 2.3m 886T2-MAX - Single Pack - Facility Post with Dual Line Webbing 3.65m 886T2/2-STD - Twin Pack - Facility Post with Dual Line Webbing 7'6" 886T2/2-MAX – Twin Pack - Facility Post with Dual Line Webbing 13'

Product Configuration



Heavy Duty Base

Post Finishes



Four plastic finishes available

Webbing Options



Dual

width (each line)

Webbing Lengths





Two lengths available in 50mm width

Webbing Designs





Range of colours, designs









MILTON KEYNES +44 1908 684 600

NEW YORK +1 631 666 0336

DUBAI +971 4 2997 228

PARIS +33 1 43 09 85 00

FRANKFURT +49 69 3003 89 010

and custom options

WROCLAW +48 71 359 3800