



2,5mm flat smooth coilnail, galvanized, Sencoted

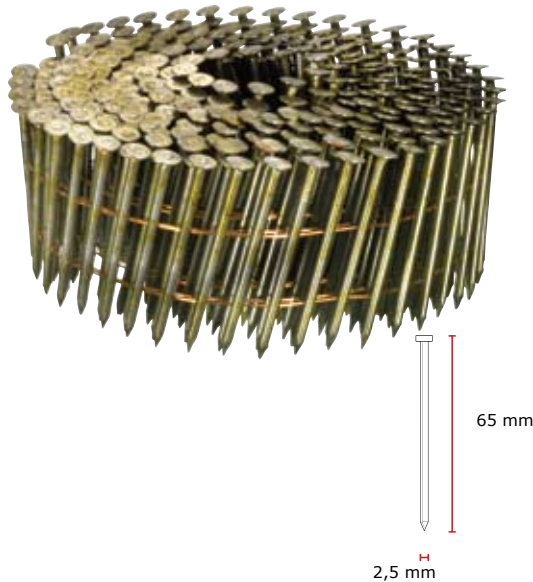

Applications

Framing, sheathing, pallets, subfloor, decks and trusses

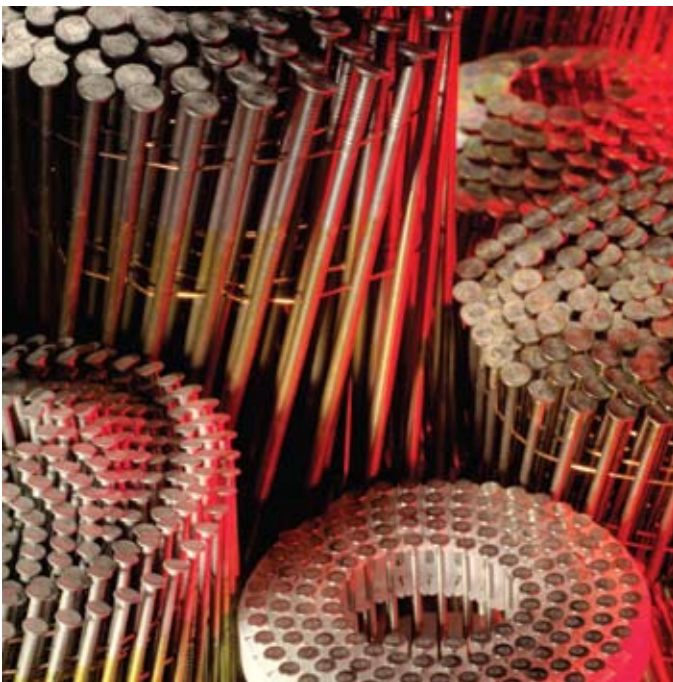

Technical specifications

Length	65 mm
Min. length fastener 1	63,38 mm
Max. length fastener 1	65,07 mm
Fastener diameter 1	2,44-2,56 mm
Nominal diameter	2,5 mm
Fastener head type 1	Full round head
Head diameter	6,35-6,98 mm
Pointangle (nominal)	36°
Point type	Diamond
Amount fasteners on strip/coil	275-275 pieces
Collation type 1	Wire collated
Collation angle	16°
Wounding type 1	Flat
Wire material	Regular galvanized standard tensile
Finish	Sencoted

Advanced technical specifications

Number declaration of performance	VS-CPR-201305-S040
Characteristic yield moment	1575 Nmm
Characteristic withdrawal parameter paralel	7,18 N/mm ²
Characterist head pull through parameter	22,45 N/mm ²
Characteristic tensile strenght	629 N/mm ²
Coating lenght	49,5 mm
Head cross sectional area	27 mm
Lenght of point	3,9 mm
Coating type	Coating type 3
Protection level in micron	≤5
CE fastener type	Round cross-section plain shank nail
Service class	1

2,5mm flat smooth coilnail, galvanized, Sencoted**Logistic specifications****Primary packaging**

Primary packaging	Box
Quantity in primary packaging	7425
GTIN (Base unit of measure)	8715274019062
Gross weight	19,58 kg