


TOLERANCES (UNLESS SPECIFIED)	
0-10mm	±0.2mm
10.1-50mm	±0.5mm
50.1-250mm	±1.0mm
>250mm	±2.0mm

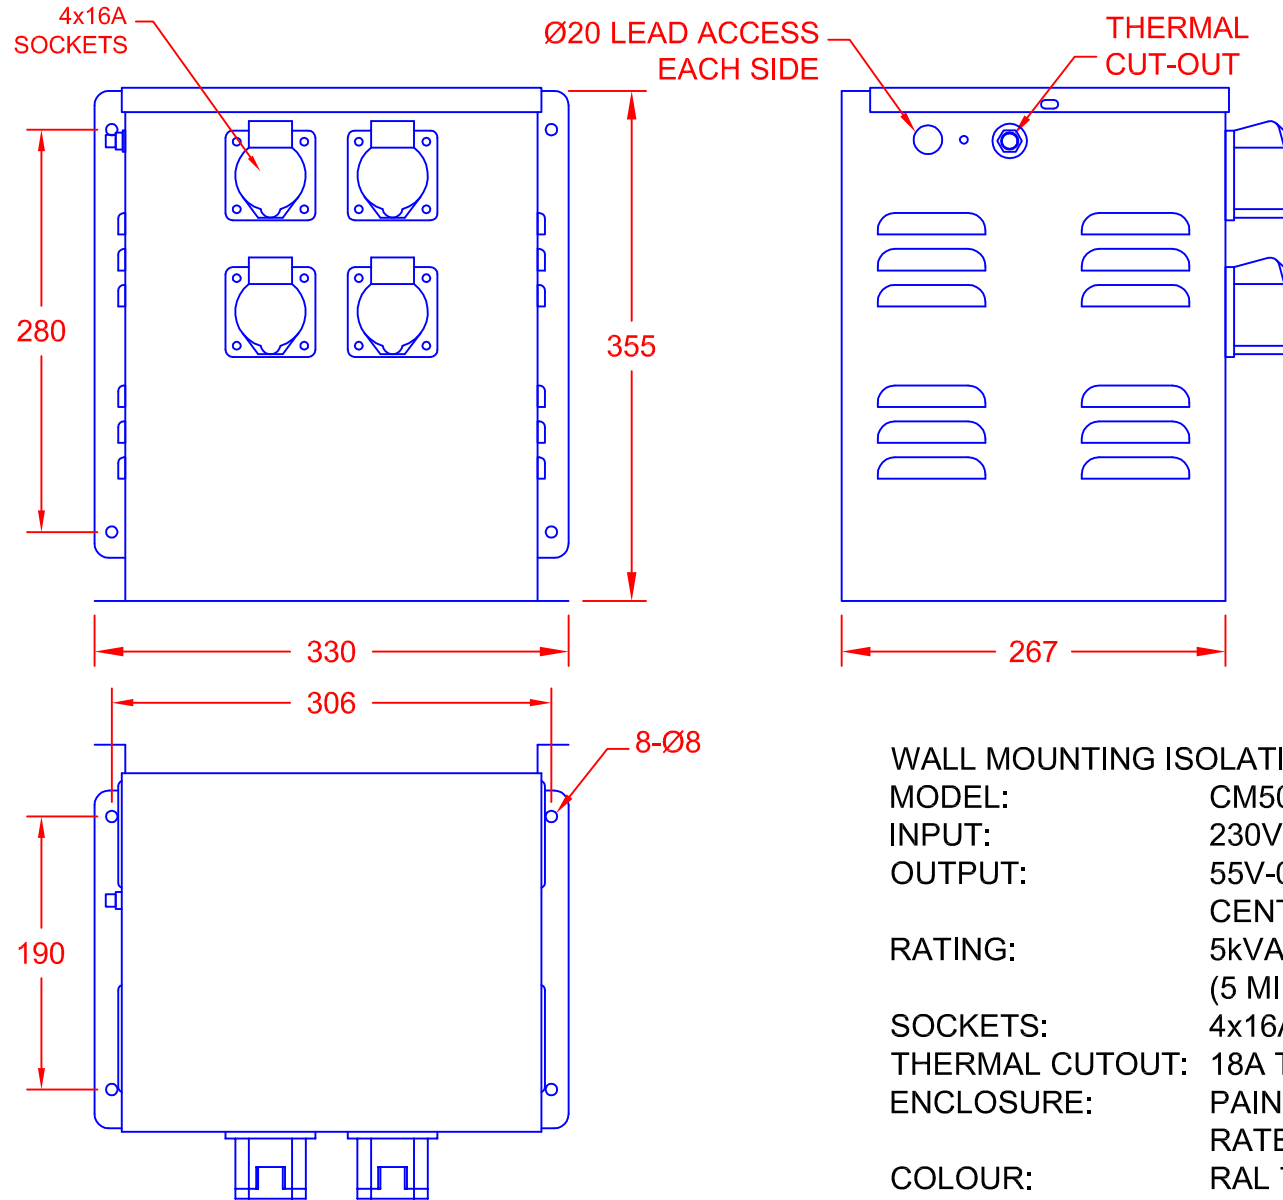

WALL MOUNTING ISOLATION TRANSFORMER

MODEL: CM5000/WM0
INPUT: 230V, 50Hz
OUTPUT: 55V-0-55V
CENTRE TAP EARTHED
RATING: 5kVA INTERMITTENT
(5 MINS ON, 15 MINS OFF)
SOCKETS: 4x16A BSEN60309
THERMAL CUTOUT: 18A THERMAL CUTOUT
ENCLOSURE: PAINTED STEEL
RATED IP22
COLOUR: RAL 7032

REV	4		CARROLL & MEYNELL TRANSFORMERS LIMITED TEL: 01642 617406 FAX: 01642 614178 enquiries@carroll-meynell.com	TITLE CM5000/WM4 WALL MOUNTING TRANSFORMER ALL DIMENSIONS IN mm	DRAWN	PROJECTION	DATE	SCALE
	3				GB		25/5/8	NTS
	2				DRAW No	6122		PAGE
	1					0		1/1