



## 2,3mm flat ring coilnail, galvanized, Sencoted

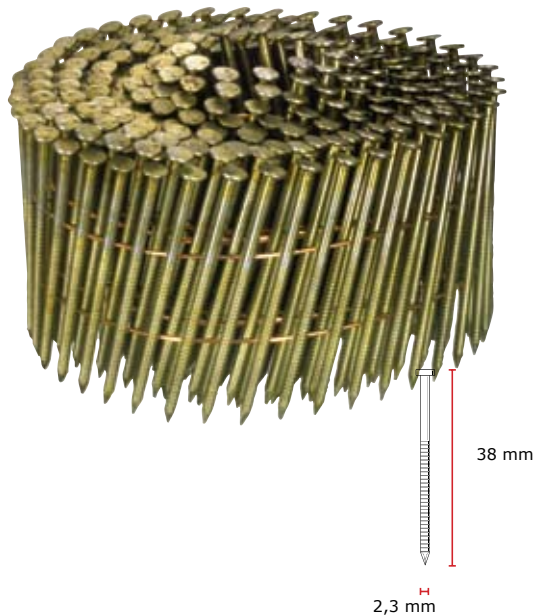

### Applications

Packaging, siding, fencing, wood shingles, crating and pallets

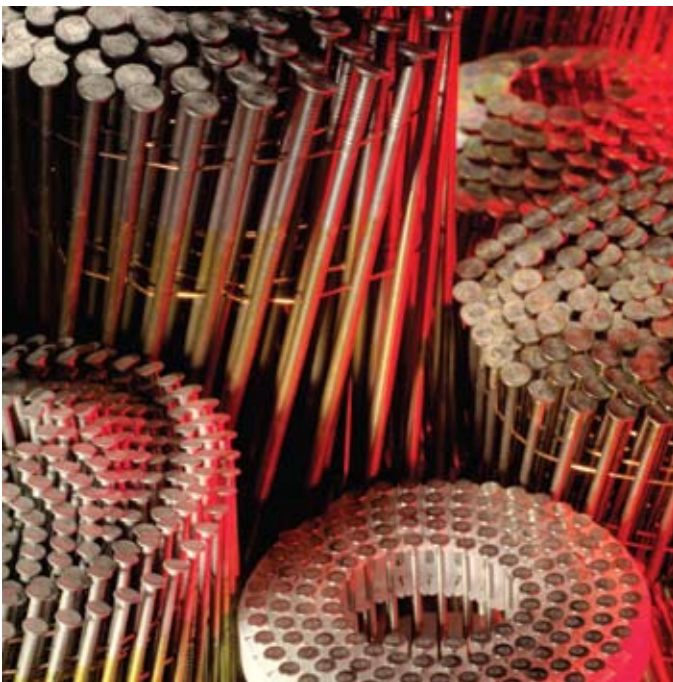

### Technical specifications

|                                |                                     |
|--------------------------------|-------------------------------------|
| Length                         | 38 mm                               |
| Min. length fastener 1         | 37,05 mm                            |
| Max. length fastener 1         | 38,95 mm                            |
| Fastener diameter 1            | 2,24-2,36 mm                        |
| Nominal diameter               | 2,3 mm                              |
| Fastener head type 1           | Full round head                     |
| Head diameter                  | 5,33-5,72 mm                        |
| Pointangle (nominal)           | 36°                                 |
| Point type                     | Diamond                             |
| Amount fasteners on strip/coil | 300-300 pieces                      |
| Collation type 1               | Wire collated                       |
| Collation angle                | 16°                                 |
| Wounding type 1                | Flat                                |
| Wire material                  | Regular galvanized standard tensile |
| Finish                         | Sencoted                            |

### Advanced technical specifications

|   |                                     |
|---|-------------------------------------|
| Number declaration of performance           | VS-CPR-201305-S007                  |
| Characteristic yield moment                 | 1575 Nmm                            |
| Characteristic withdrawal parameter paralel | 7,67 N/mm <sup>2</sup>              |
| Characterist head pull through parameter    | 22,45 N/mm <sup>2</sup>             |
| Characteristic tensile strenght             | 629 N/mm <sup>2</sup>               |
| Coating lenght                              | 25,5 mm                             |
| Head cross sectional area                   | 23 mm                               |
| Lenght of threaded part                     | 19 mm                               |
| Lenght of point                             | 3,6 mm                              |
| Coating type                                | Coating type 3                      |
| Protection level in micron                  | ≤5                                  |
| CE fastener type                            | Round cross-section ring shank nail |
| Service class                               | 1                                   |

**2,3mm flat ring coilnail, galvanized, Sencoted****Logistic specifications****Primary packaging**

|                               |               |
|-------------------------------|---------------|
| Primary packaging             | Box           |
| Quantity in primary packaging | 13500         |
| GTIN (Base unit of measure)   | 8715274049014 |
| Gross weight                  | 17,696 kg     |