

FM-X5

TASSELLO PROLUNGATO PER SERRAMENTI LONG PLUG FOR WINDOW AND DOOR FRAMES

BASSA COPPIA DI SERRAGGIO


LOW TIGHTENING TORQUE

NYLON EXTRA FLESSIBILE

ULTRA FLEXIBLE NYLON

VITE SEMPRE PREMONTATA

SCREW ALWAYS PREASSEMBLED

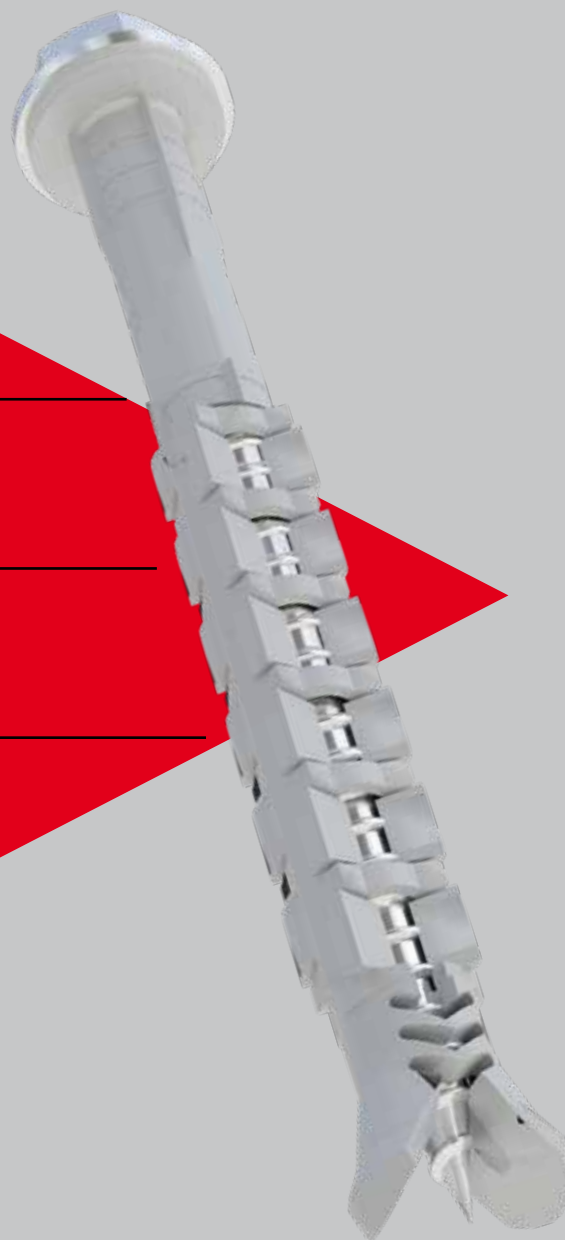

Il tassello progettato con e per i serramentisti, e certificato per tutti i principali supporti. La sua flessibilità e la bassa coppia di serraggio permettono un primo bloccaggio a mano, per poi procedere con un ancoraggio definitivo a sottosquadro in qualsiasi apertura disponibile, anche in caso di supporti non perfetti o relativamente fragili.

The plug designed with and for frame builders, and certified for all major base materials. Its flexibility and low torque enable an initial hand tightening, followed by a permanent undercut anchorage in any available cavity, even with less than perfect or relatively fragile base materials.


FM-X5

Tassello prolungato per serramenti
Long plug for window and door frames



Assemblato
Tassello bordo svasato
Vite TPS
Zincata bianca
Ø 6 impronta Torx T30
Ø 7 impronta Torx T40

Assembled
Countersunk rim plug
Countersunk head screw
White zinc plated
Ø 6 Torx T30 recess
Ø 7 Torx T40 recess

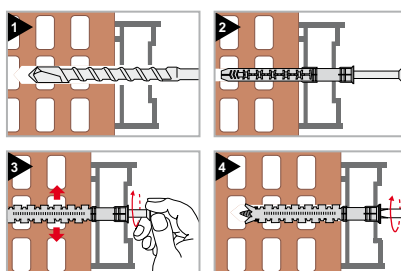

Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. fissabile Fixing thickness max	Conf. Pkg.	Imballo Outerbox
64301b08080	8x80	6x85	10	100	1000
64301b08100	8x100	6x105	30	50	500
64301b08120	8x120	6x125	50	50	500
64301b08150	8x150	6x155	80	50	-
64301b08170	8x170	6x175	100	50	-
64301b10085	10x85	7x90	15	50	500
64301b10100	10x100	7x105	30	50	500
64301b10115	10x115	7x120	45	50	500
64301b10135	10x135	7x140	65	50	200
64301b10160	10x160	7x165	90	50	-
64301b10200	10x200	7x205	130	50	-
64301b10230	10x230	7x235	160	50	-



Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. fissabile Fixing thickness max	Conf. Pkg.	Imballo Outerbox
64302b08080	8x80	6x85	10	100	1000
64302b08100	8x100	6x105	30	50	500
64302b08120	8x120	6x125	50	50	500
64302b08150	8x150	6x155	80	50	-
64302b10085	10x85	7x90	15	50	500
64302b10100	10x100	7x105	30	50	500
64302b10115	10x115	7x120	45	50	500
64302b10135	10x135	7x140	65	50	200
64302b10160	10x160	7x165	90	50	-



Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. fissabile Fixing thickness max	Conf. Pkg.	Imballo Outerbox
64402b10085	10x85	7x90	15	50	500
64402b10100	10x100	7x105	30	50	500
64402b10115	10x115	7x120	45	50	500
64402b10135	10x135	7x140	65	50	200
64402b10160	10x160	7x165	90	50	-

Assemblato
Tassello bordo svasato
Vite speciale TER con rondella
integrata
Zincata bianca
Ø 6 rondella integrata Ø15
Chiave 10, impronta Torx T30
Ø 7 rondella integrata Ø19
Chiave 13, impronta Torx T40

Assembled
Countersunk rim plug
Special hex head screw with built-in
washer
White zinc plated
Ø 6 built-in washer Ø15
Wrench 10, Torx T30 recess
Ø 7 built-in washer Ø19
Wrench 13, Torx T40 recess



Assemblato
Tassello bordo maggiorato Ø18
Vite speciale TER con rondella
integrata Ø19
Zincata bianca
Chiave 13, impronta Torx T40

Assembled
Plug with large rim Ø18
Special hex head screw with built-in
washer Ø19
White zinc plated
Wrench 13, Torx T40 recess





3DG finitura opaca 3DG matte finish Cod.	Inox A4-70 Stainless steel A4-70 Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. fissabile Fixing thickness max	Conf. Pkg.	Imballo Outerbox
64301c08080	64301008080	8x80	6x85	10	100	1000
64301c08100	64301008100	8x100	6x105	30	50	500
64301c08120	64301008120	8x120	6x125	50	50	500
64301c08150	64301008150	8x150	6x155	80	50	-
64301c08170	64301008170	8x170	6x175	100	50	-
64301c10085	64301010085	10x85	7x90	15	50	500
64301c10100	64301010100	10x100	7x105	30	50	500
64301c10115	64301010115	10x115	7x120	45	50	500
64301c10135	64301010135	10x135	7x140	65	50	200
64301c10160	64301010160	10x160	7x165	90	50	-
64301c10200	64301010200	10x200	7x205	130	50	-
64301c10230	64301010230▲	10x230	7x235	160	50	-



3DG finitura opaca 3DG matte finish Cod.	Inox A4-70 Stainless steel A4-70 Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. fissabile Fixing thickness max	Conf. Pkg.	Imballo Outerbox
64302c10085	64302010085	10x85	7x90	15	50	500
64302c10100	64302010100	10x100	7x105	30	50	500
64302c10115	64302010115	10x115	7x120	45	50	500
64302c10135	64302010135	10x135	7x140	65	50	200
64302c10160	64302010160	10x160	7x165	90	50	-



3DG finitura opaca 3DG matte finish Cod.	Inox A4-70 Stainless steel A4-70 Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. fissabile Fixing thickness max	Conf. Pkg.	Imballo Outerbox
64402c10085	64402010085	10x85	7x90	15	50	500
64402c10100	64402010100	10x100	7x105	30	50	500
64402c10115	64402010115	10x115	7x120	45	50	500
64402c10135	64402010135	10x135	7x140	65	50	200
64402c10160	64402010160	10x160	7x165	90	50	-

Assemblato Tassello bordo svasato Vite TPS Ø 6 impronta Torx T30 Ø 7 impronta Torx T40

Assembled
Countersunk rim plug
Countersunk head screw
Ø 6 Torx T30 recess
Ø 7 Torx T40 recess



Assemblato Tassello bordo svasato Vite speciale TER con rondella integrata Ø19 Chiave 13 Impronta Torx T40

Assembled
Countersunk rim plug
Special hex head screw with built-in
washer Ø19
Wrench 13
Torx T40 recess



Assemblato Tassello bordo maggiorato Ø18 Vite speciale TER con rondella integrata Ø19 Chiave 13 impronta Torx T40

Assembled
Plug with large rim Ø18
Special hex head screw with built-in
washer Ø19
Wrench 13, Torx T40 recess



Classe di resistenza al fuoco 90 minuti
in calcestruzzo, tassello Ø10
Fire resistance class = 90 minutes plug Ø10
in concrete



ITA



ENG

FISSAGGI PROLUNGATI
LONG FIXINGS

FISSAGGI METALLICI - CHIMICI - PLASTICI
METALLIC - CHEMICAL - NYLON FIXINGS

CATALOGO 2024
CATALOGUE 2024