



## 2,9mm barbed stripnail, HDG, Sencoted



### Applications

Framing, sheathing, subfloor, decks, trusses and pallets

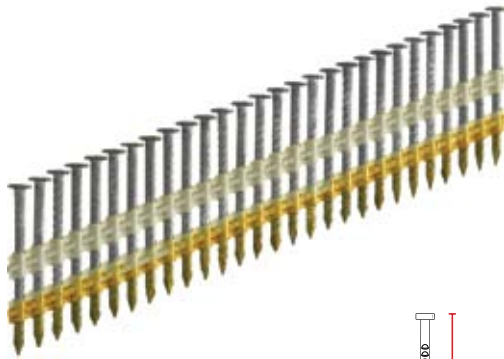

### Technical specifications

Length	50 mm
Fastener head type 1	Full round head
Pointangle (nominal)	40°
Point type	Diamond
Max. strip length	170,18 mm
Amount fasteners on strip/coil	28-28 pieces
Collation type 1	Plastic collated
Collation angle	21°
Wire material	Hot-dipped galvanized corrosivity class 3
Finish	Sencoted

### Advanced technical specifications

Characteristic yield moment	3192 Nmm
Characteristic withdrawal parameter paralel	6,71 N/mm <sup>2</sup>
Characterist head pull through parameter	50,1 N/mm <sup>2</sup>
Characteristic tensile strenght	695 N/mm <sup>2</sup>
Coating lenght	37,5 mm
Head cross sectional area	36 mm
Lenght of threaded part	30 mm
Lenght of point	3,7 mm
Coating type	Coating type 3
Protection level in micron	55
CE fastener type	Round cross-section ring shank nail
Service class	3

**2,9mm barbed stripnail, HDG, Sencoted****Logistic specifications****Primary packaging**

Primary packaging	Box
Quantity in primary packaging	2000
GTIN (Base unit of measure)	8715274037202
Gross weight	6,484 kg