



2,9mm flat smooth coilnail, bright basic, Sencoted

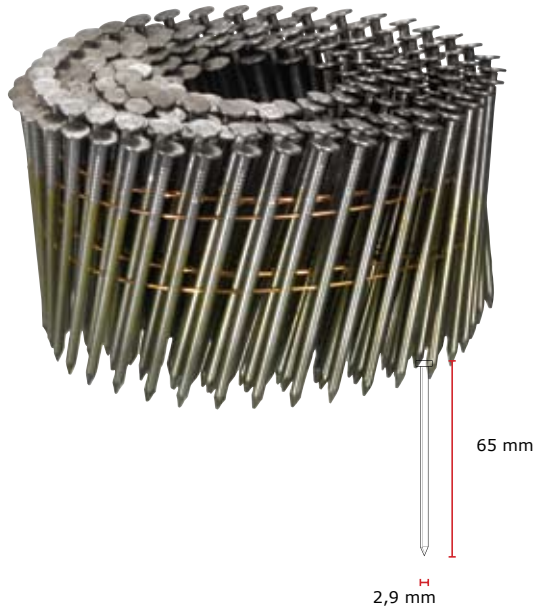

Applications

Framing, sheathing, pallets, subfloor, decks and trusses

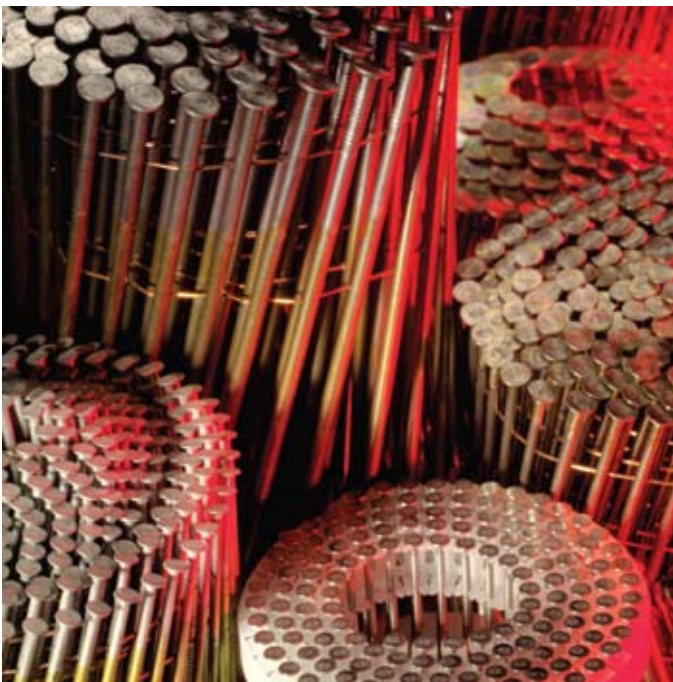

Technical specifications

Length	65 mm
Min. length fastener 1	63,38 mm
Max. length fastener 1	65,07 mm
Fastener diameter 1	2,8-2,94 mm
Nominal diameter	2,9 mm
Fastener head type 1	Full round head
Head diameter	6,6-6,98 mm
Pointangle (nominal)	40°
Point type	Diamond
Amount fasteners on strip/coil	250-250 pieces
Collation type 1	Wire collated
Collation angle	16°
Wounding type 1	Flat
Wire material	Bright basic standard tensile
Finish	Sencoted

Advanced technical specifications

Number declaration of performance	VS-CPR-201305-S009
Characteristic yield moment	2698 Nmm
Characteristic withdrawal parameter paralel	3,44 N/mm ²
Characterist head pull through parameter	24,43 N/mm ²
Characteristic tensile strenght	695 N/mm ²
Coating lenght	49,5 mm
Head cross sectional area	36 mm
Lenght of point	3,7 mm
Coating type	Coating type 3
Protection level in micron	0
CE fastener type	Round cross-section plain shank nail
Service class	1

2,9mm flat smooth coilnail, bright basic, Sencoted**Logistic specifications****Primary packaging**

Primary packaging	Box
Quantity in primary packaging	6750
GTIN (Base unit of measure)	8715274025292
Gross weight	21,053 kg