

SPECIFICATION SHEET

110V 30W LED GLOBE LIGHT



The 110V 30W LED Globe Light has a 360 degree light distribution, allowing light in all directions therefore making it efficient workspace lighting.

Applications

- Site Lighting




Specification

LED:	60/75pcs of SMD 2835
Material:	Polycarbonate Diffuser & ABS Body
Colour Temperature:	6500K
Guarantee:	2 Years
Life Expectancy:	35,000 Hours
Working Temperature:	-20°C - 40°C
Power Factor:	>0.9
Beam Angle:	360°
CRI:	>80 Ra

Additional Information

- 86lm/W
- Adjustable Tripod available separately
- Driver included
- H05VV-F 5m Cable included
- Ni-Cd SC 3.6V Battery included
- Opal diffuser & yellow body finish
- PG11 Cable glands included

Dimensions

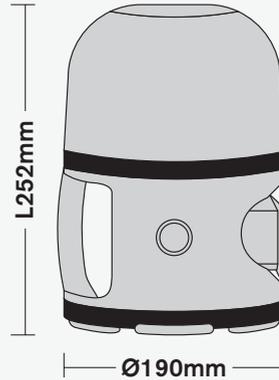

Code	Emergency	Lumen Output	Dimensions (L x Ø/W mm)
GLS30YPW	No	2600lm	252 x 190
GLE30YPW	Yes	2600lm / 399lm in emergency mode	252 x 190
GLTYPW	ADJUSTABLE TRIPOD FOR LED GLOBE LIGHTS		1490 x 795