

GRIPPS®



H01318-1 / H01318-2 / H01318-3

GRIPPMAX 750 GSM - FR GRID MESH MATTING

Engineered for safety at heights, GrippMax 750GSM - FR Grid Mesh Matting delivers superior drop prevention for grid mesh platforms.

This matting is crafted from high-quality polyester with a durable PVC coating, ensuring both fire retardancy (BS 7837 certified) and high UV resistance. Designed for repeated use across multiple job sites, ensuring long-lasting reusability.

GrippMax is easy to install, compact when rolled, and can be fastened securely with GrippClips or zip ties. Available in three sizes, it offers a flexible, economical, and compliant solution for elevated work environments.

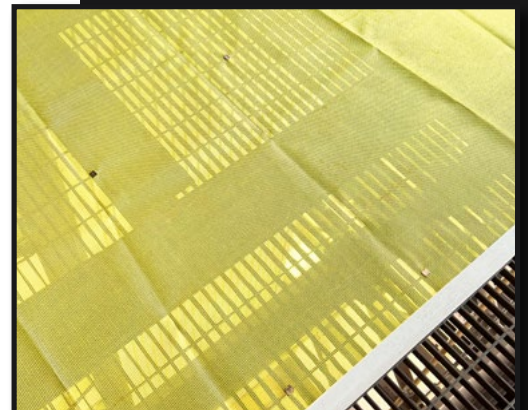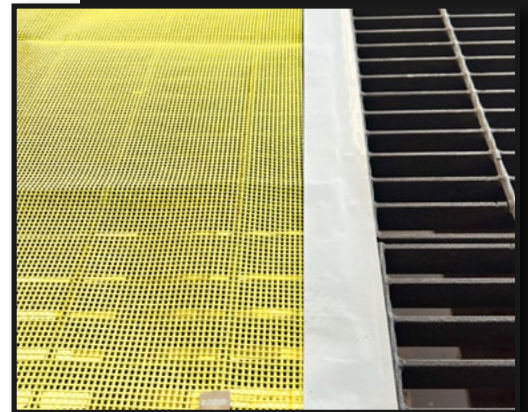

ENGINEERED FOR DROP PREVENTION

gripps.com

KEY FEATURES

Heavy-Duty 750gsm

Construction:

Built with a thick 750gsm material for enhanced durability and long-lasting reuse across job sites.

Fire Retardant:

Certified to BS 7837,

making it suitable for projects with strict fire safety requirements.

Easy Installation:

Simple to roll out and fasten with GrippClips or ties. Extremely easy to remove and store.

Reusable and Portable:

GrippGrid can be rolled up and reused from site to site, reducing waste and cost.

SPECIFICATIONS


SKU	H01318-1	H01318-2	H01318-3
DIMENSIONS	1 m x 28.9 m 3.3 ft x 94.8 ft	2 m x 28.9 m 6.6 ft x 94.8 ft	3 m x 28.9 m 9.8 ft x 94.8 ft
WEIGHT	750g/sm	750g/sm	750g/sm
BASE FABRIC	Polyester	Polyester	Polyester
COATING	PVC	PVC	PVC
FIRE RETARDANT	BS 8737	BS 8737	BS 8737
COLOR	Yellow	Yellow	Yellow

*Last update: 28.10.25

HOW TO USE

POSITIONING GRIPPGRID


1

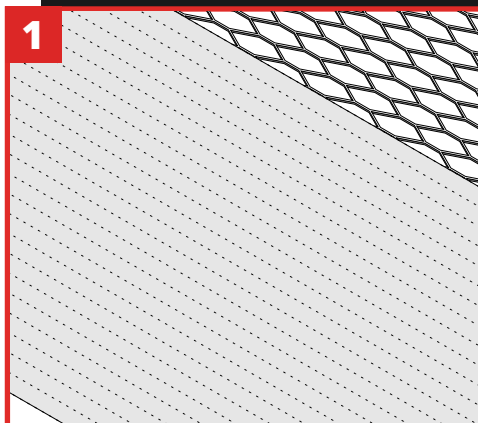


Place roll of GrippGrid on gridmesh floor in the desired location. Roll out the matting ensuring material is flat without kinks.

SECURING GRIPPGRID

2

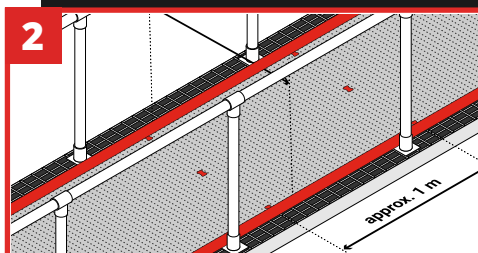

Fasten GrippGrid with GRIPPS® GrippClips, zip ties (or similar) in corners and along edging. Remove GrippClips/ties and roll back up for re-use when finished.

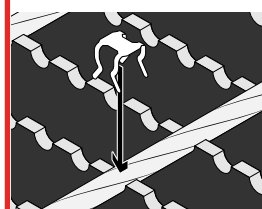


H06055 GrippClip

Lay down your GRIPPS® GrippGrid Matting flat. After, locate the intersection of the load and cross bars in the steel. Orientate the clip correctly so it will hold the cross bar.

CONNECTING GRIPPGRID

3

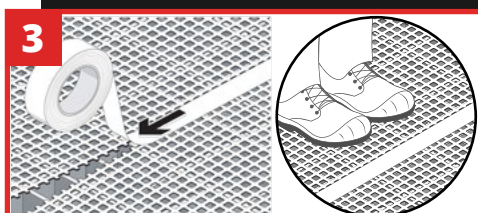

H06050 MatGripp Tape

To join two lengths of GrippGrid matting, remove the tape backing and apply it evenly across the join. Take care to avoid creating a trip hazard. In high-traffic areas, consider applying a second length of tape on the reverse to strengthen the join.