


3,1mm smooth stripnail, galvanized, Sencoted



Applications

Framing, sheathing, subfloor, decks, trusses and pallets

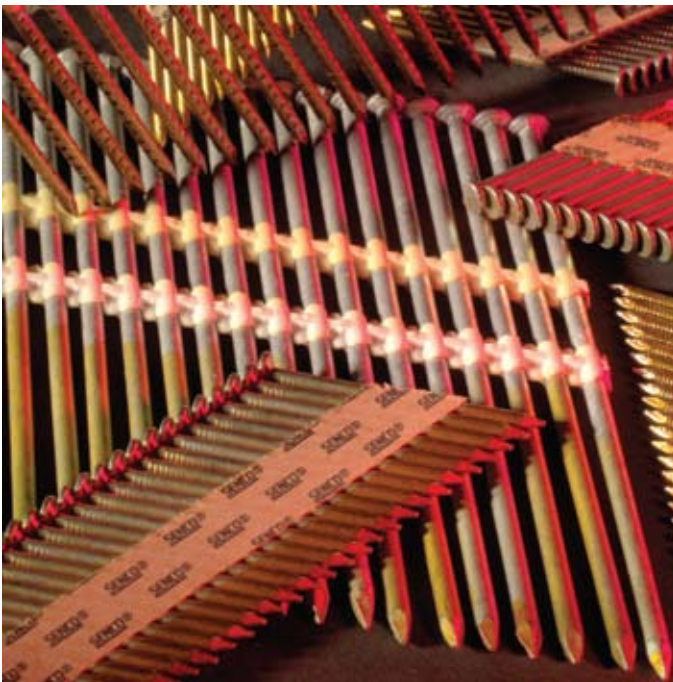

Technical specifications

Length	90 mm
Fastener head type 1	Clipped head
Pointangle (nominal)	40°
Point type	Diamond
Max. strip length	202,97 mm
Amount fasteners on strip/coil	59-61 pieces
Collation type 1	Paper collated
Collation angle	34°
Wire material	Regular galvanized standard tensile
Finish	Sencoted

Advanced technical specifications

Number declaration of performance	VS-CPR-201305-S028
Characteristic yield moment	2570 Nmm
Characteristic withdrawal parameter paralel	3,1 N/mm ²
Characterist head pull through parameter	30,1 N/mm ²
Characteristic tensile strenght	633 N/mm ²
Coating lenght	60 mm
Head cross sectional area	30 mm
Lenght of point	4 mm
Coating type	Coating type 3
Protection level in micron	≤5
CE fastener type	Round cross-section plain shank nail
Service class	1

3,1mm smooth stripnail, galvanized, Sencoted**Logistic specifications****Primary packaging**

Primary packaging	Box
Quantity in primary packaging	3000
GTIN (Base unit of measure)	4032933207320
Gross weight	15,555 kg