



3,1mm conical smooth coilnail, HDG, plain

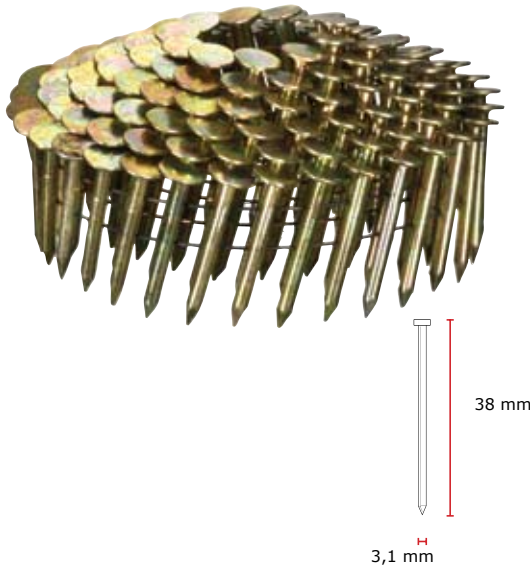

Applications

Asphalt & fiberglass shingles, siding and vapor barriers

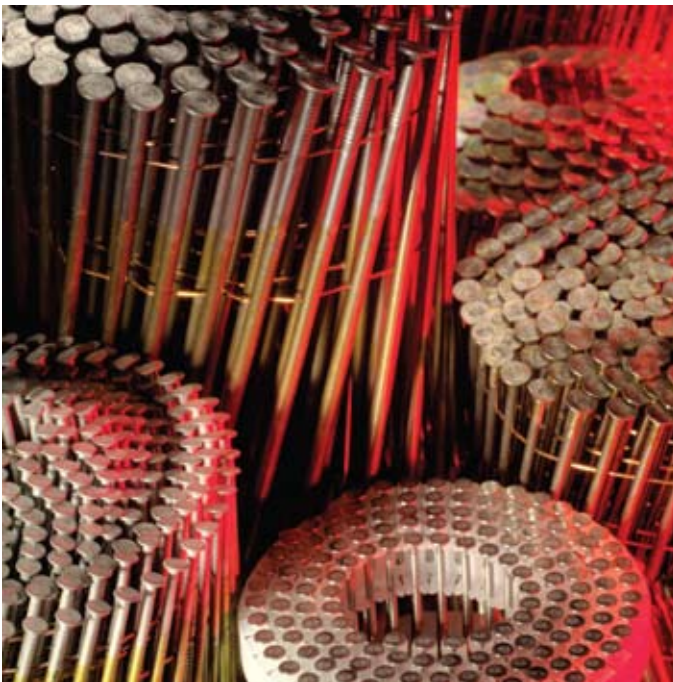

Technical specifications

Length	38 mm
Min. length fastener 1	37,05 mm
Max. length fastener 1	38,1 mm
Fastener diameter 1	2,98-3,14 mm
Nominal diameter	3,1 mm
Fastener head type 1	Full round head
Head diameter	8,99-10,21 mm
Pointangle (nominal)	45°
Point type	Diamond
Amount fasteners on strip/coil	120-120 pieces
Collation type 1	Wire collated
Collation angle	16°
Wounding type 1	Conical
Wire material	Hot-dipped galvanized corrosivity class 3
Finish	Plain

Advanced technical specifications

Number declaration of performance	VS-CPR-201305-S013
Characteristic yield moment	3193 Nmm
Characteristic withdrawal parameter paralel	3,9 N/mm ²
Characterist head pull through parameter	36,5 N/mm ²
Characteristic tensile strenght	621 N/mm ²
Head cross sectional area	72 mm
Lenght of point	3,8 mm
Coating type	NA
Protection level in micron	30
CE fastener type	Round cross-section plain shank nail
Service class	3

3,1mm conical smooth coilnail, HDG, plain**Logistic specifications****Primary packaging**

Primary packaging	Box
Quantity in primary packaging	1800
GTIN (Base unit of measure)	8715274054902