

## Shaft ladders

- + Made of hot dipped steel galvanised or stainless steel, pickled and passivated
- + According to DIN EN 14396 and Construction Product Regulation (BauPVO) 305/2011 (EU), type tested
- + Access aids according to DIN 19572
- + Clearance width 300 mm/400 mm
- + Rectangular side rails 50 x 20 mm, non-slip perforated rungs
- + Shaft ladders made of glass-fibre reinforced plastic are available on request
- + Attachment of an access protection rail is only allowed in case of clearance widths of 400 mm








Ladders with 4 – 9 rungs need 4 wall anchors,  
ladders with 10 – 15 rungs need 6 wall anchors,  
ladders with 16 – 24 rungs need 10 wall anchors.



### Shaft ladders made of steel galvanised

Number of rungs	Length approx. m	Outside width mm	Clearance width mm	Art.-No.	Outside width mm	Clearance width mm	Art.-No.
4	1.12	340	300	815798	440	400	815910
5	1.40	340	300	815804	440	400	815927
6	1.68	340	300	815811	440	400	815934
7	1.96	340	300	815828	440	400	815941
8	2.24	340	300	815835	440	400	815958
9	2.52	340	300	815842	440	400	815965
10	2.80	340	300	815859	440	400	815972
11	3.08	340	300	815866	440	400	815989
12	3.36	340	300	815873	440	400	815996
13	3.64	340	300	815880	440	400	816009
14	3.92	340	300	815897	440	400	816016
15	4.20	340	300	815903	440	400	816023

#### Accessories: Wall anchor

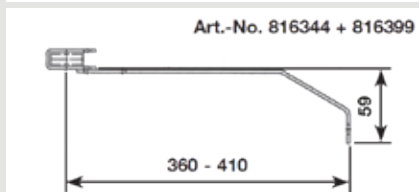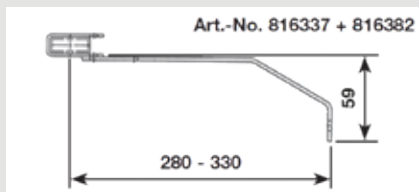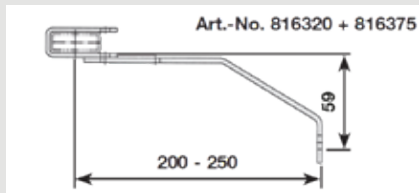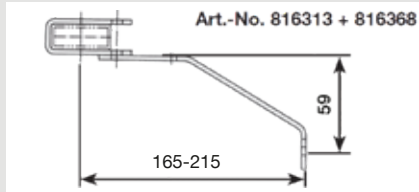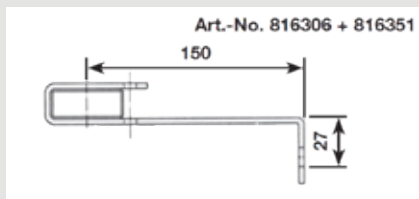

### Shaft Ladders made of stainless steel V4A (1.4571)

Number of rungs	Length approx. m	Outside width mm	Clearance width mm	Art.-No.	Outside width mm	Clearance width mm	Art.-No.
4	1.12	340	300	816030	440	400	816153
5	1.40	340	300	816047	440	400	816160
6	1.68	340	300	816054	440	400	816177
7	1.96	340	300	816061	440	400	816184
8	2.24	340	300	816078	440	400	816191
9	2.52	340	300	816085	440	400	816207
10	2.80	340	300	816092	440	400	816214
11	3.08	340	300	816108	440	400	816221
12	3.36	340	300	816115	440	400	816238
13	3.64	340	300	816122	440	400	816245
14	3.92	340	300	816139	440	400	816252
15	4.20	340	300	816146	440	400	816269

### Accessories for shaft ladders

Fastening material for shaft ladders	Art.-Nr.
Foot plate V4A stainless steel, (pc.)	816917
Ladder connectors for extensions, V4A stainless steel (set)	816283
Wall anchor Standard 150 mm. Steel galvanised (pc.)	816306
Wall anchor adjustable 165–215 mm. Steel galvanised (pc.)	816313
Wall anchor adjustable 200–250 mm. Steel galvanised (pc.)	816320
Wall anchor adjustable 280–330 mm. Steel galvanised (pc.)	816337
Wall anchor adjustable 360–410 mm. Steel galvanised (pc.)	816344
Wall anchor Standard 150 mm. V4A. (pc.)	816351
Wall anchor adjustable 165–215 mm. V4A. (pc.)	816368
Wall anchor adjustable 200–250 mm. V4A. (pc.)	816375
Wall anchor adjustable 280–330 mm. V4A. (pc.)	816382
Wall anchor adjustable 360–410 mm. V4A. (pc.)	816399