



L staple galvanized, Sencoted

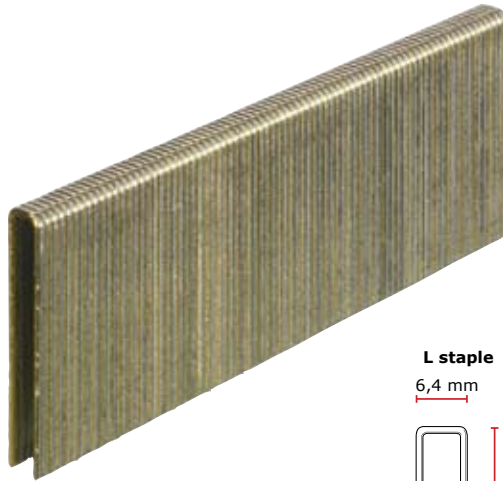

L staple
6,4 mm




Applications

Cabinets, casebacks, drawers, upholstery, soffits, underlayment, lattice & insulative sheathing

Technical specifications

Staple-leg length nominal	25,4 mm
Staple-leg length min max	25,02 - 26,16 mm
Staple-leg length diff	0,38 mm
Staple-crown width nominal	6,4 mm
Staple-width	1,23 mm
Staple-inside width	3,34 mm
Staple-wire size	1,17 mm
Staple-thickness	1,04 mm
Staple-cross walk tol.	0,53 mm
Pointangle (nominal)	70°
Point type	Chisel
Max. strip length	99,52 mm
Collation type 1	Glue collated
Collation angle	0°
Gauge	18 ga.
Wire material	Regular galvanized standard tensile
Finish	Sencoted

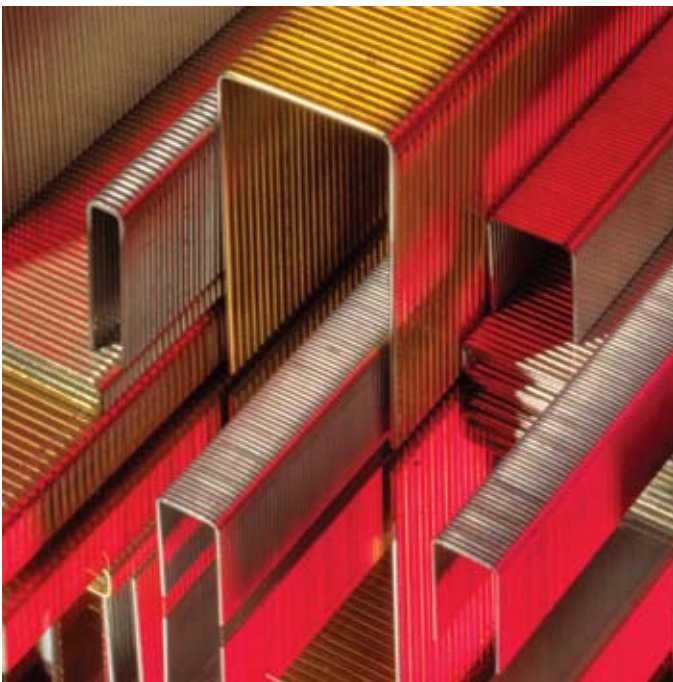

L staple galvanized, Sencoted**Logistic specifications****Primary packaging**

Primary packaging	Box
Quantity in primary packaging	5000
GTIN (Base unit of measure)	8715274000114
Gross weight	2,245 kg