




LED EMERGENCY DOWNLIGHT

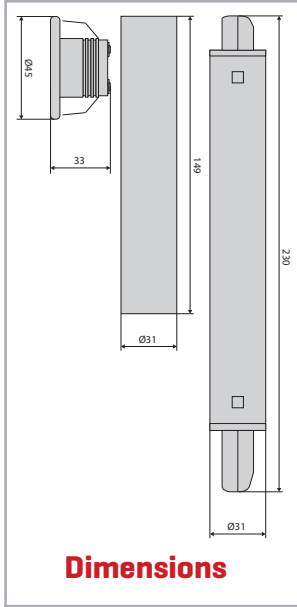



CODE	DESCRIPTION	LUMEN OUTPUT	LM/W	CRI	POWER FACTOR	DIMENSIONS (Ø x L MM)	WEIGHT (KG)
LFLEDW1.5WNM	EMERGENCY NON-MAINTAINED CIRCULAR DOWNLIGHT WHITE 1.5W LED	117 lm	78 lm/W	Ra 70	0.17	PCB Housing: 31 x 230mm Battery: 31 x 149mm Lamp Head: 45 x 33mm	0.34

Additional Information

LED Emergency Downlight is discreet and easy to install, has a deep discharge & overcharge protection & has a 3 hour emergency duration.

Key Features

- Cut-out: Ø: 35mm
- 3 Hours emergency duration
- 3V Deep discharge protection
- 3.6V 2000mAh Ni-Cd Battery included
- 4.3V Overcharge protection
- 24 Hours charging time
- LED Lifetime 35,000 hours
- Working Temperature 0°C to 40°C




*Batteries 1 year guarantee



LED EMERGENCY DOWNLIGHT

Photometric Light Distribution Curve

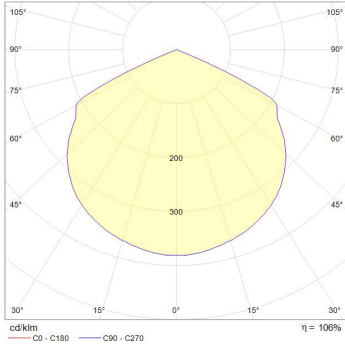

- Wattage: 1.5W
- Lumen Output: 117lm
- LOR: 100%

Recommended Spacing

Open Area				
Mount Height (m)	Open Area 0.5 Lux min (m)			
2.5	3.8	9.7	3.8	9.7
2.8	3.9	10.3	3.9	10.3
3.0	4.0	10.5	4.0	10.5
4.0	4.1	11.1	4.1	11.1
5.0	4.0	11.7	4.0	11.7

Escape Route		
Mount Height (m)	Escape Route 1 Lux min (m)	
2.5	2.9	7.7
2.8	2.9	7.8
3.0	2.9	8.0
4.0	2.7	8.3