

# SAFATEX Linear Lights

ATEX LED Linear luminaires, 36W or 60W. –one 1 and –one 21 approved.



u † †



## KEY FEATURES AT A GLANCE:

- ATEX Approved to Zone 1 and Zone 21
- 4,212 lumen, 36W output or 7,380 lumen 60W
- LED array, suitable replacement for fluorescent light fittings
- Impact resistant diffuser
- AC 100-277V ~ 50/60HZ
- 6 - 12kV Surge protection
- Cable input/output at each end of the fitting, supplied with 0.5m cable
- Corrosion resistant aluminium housing, stainless steel mounting bracket
- Low and narrow profile and light weight
- Temperature class T1 to T6
- 36W - 685mm x 126mm x 88mm - 4.5kgs
- 60W - 1281mm x 126mm x 88mm - 7.5kgs
- Temperature class T1 to T6
- IP66 Rated


## Certification and Standards

### ATEX Certification

Ex: II 2 G Ex emb IIC T6 Gb

Ex: II 2 D Ex tb IIIC 80°C Db IP66

ATEX Zone 1 & 2 and 21 & 22

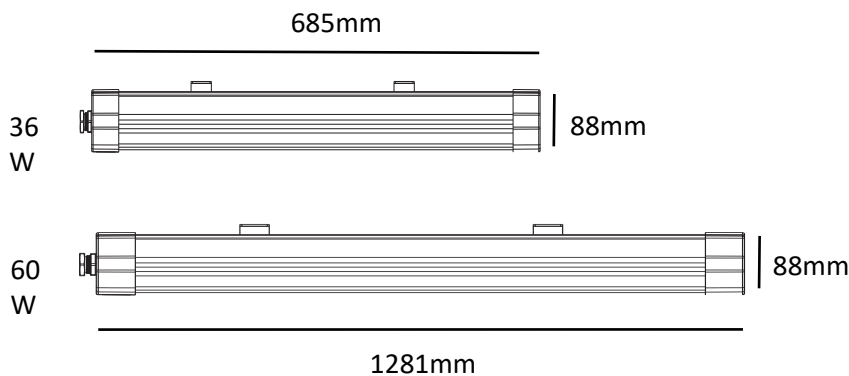

The NightSearcher SAFATEX O is part of the NightSearcher SAFATEX ATEX LED fixed lighting range. It is ATEX and UL certified as well as CE and RoHS accredited. It is certified to ATEX Zone for gas Zone 2 for dust. Example applications include manufacturing plants, chemical and petrochemical processing facilities, sewage treatment plants, offshore and dockside installations.



**Robust IP66 Aluminium Housing**



**Impact Resistant Diffuser**



**PRODUCT CODE:**  
**36W - SAFA-AC-FLO-LIN-685**  
**60W - SAFA-AC-FLO-LIN-1281**

Register your purchase on the NightSearcher website to upgrade your warranty from 3 to 5 years, free of charge.  
[www.nightsearcher.co.uk](http://www.nightsearcher.co.uk)