



P staple galvanized, Sencoted

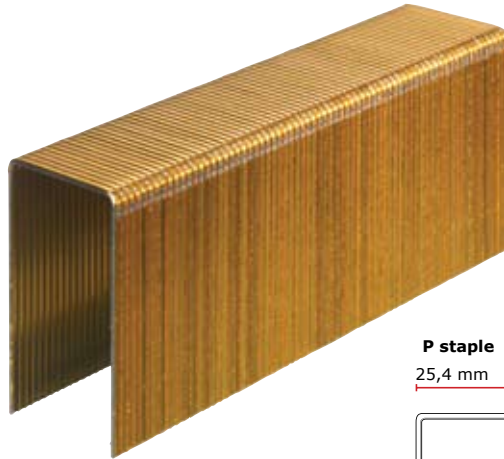


Technical specifications

Staple-leg length nominal	38,1 mm
Staple-leg length min max	37,1 - 39,1 mm
Staple-leg length diff	2 mm
Staple-crown width nominal	25,4 mm
Staple-width	1,58 mm
Staple-inside width	23,42 mm
Staple-wire size	1,51 mm
Staple-thickness	1,4 mm
Staple-cross walk tol.	0,56 mm
Pointangle (nominal)	70°
Point type	Chisel
Max. strip length	113,2 mm
Collation type 1	Glue collated
Collation angle	0°
Gauge	16 ga.
Wire material	Regular galvanized standard tensile
Finish	Sencoted

Applications

Sheathing, house wrap, composite roofing, roofing felt, corrugated containers, foam insulation board, furniture/cabinet frames and butt-joints

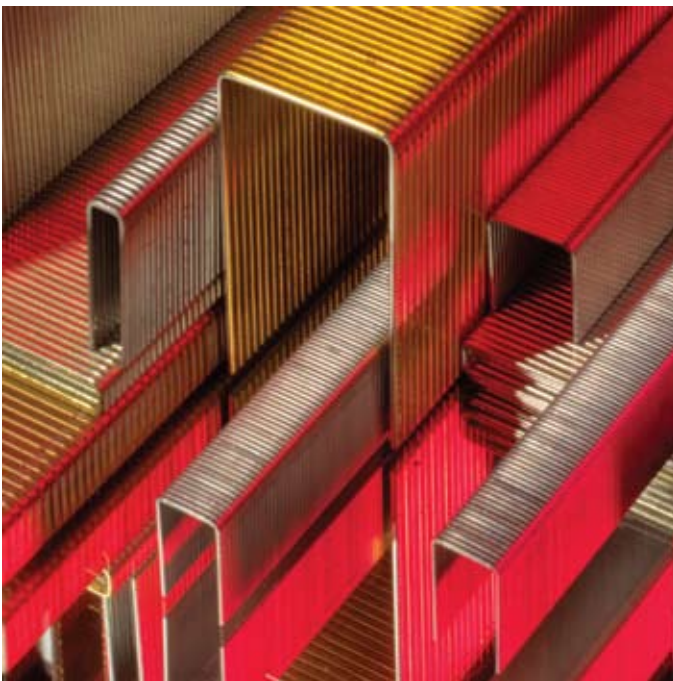

P staple galvanized, Sencoted**Logistic specifications****Primary packaging**

Primary packaging	Box
Quantity in primary packaging	5000
Gross weight	6,62 kg