


PROGUARD CORRUGATED CARD PROTECTION BOARD

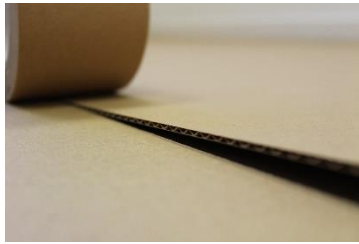

Product Code	Pricing Unit	Colour	Dimensions	Thickness	Pack Quantity	Pallet Quantity
PBC12	Each	Brown	2.4m x 1.2m	3mm	25	360

Product Description:

Proguard Corrugated Card Protection Board is manufactured from strong corrugated cardboard to provide long lasting protection for windows, doors, stairs, walls and floors. Lightweight and extremely strong, the cardboard sheets are tear-, puncture- and impact-resistant. They can be cut, curved and creased to fit any surface offering complete surface protection for a variety of applications during refurbishment, building and construction projects.

Proguard Corrugated Card Protection Board is similar to twin wall plastic sheeting and correx board, and is ideal for the same uses – i.e. protection for floors and other surfaces. It is the sustainable alternative to Correx® twin wall plastic sheets.

Benefits:

- Provides efficient protection from knocks, scratches and spills.
- Lightweight and flexible.
- Quick and easy to cut, crease and curved.
- Durable and reusable.
- Made from 100% recycled content
- 100% Recyclable.
- Personalised logo and branding printing available.
- Proguard Corrugated Card Protection Board is available in a variety of sizes and formats.

Limitations:

- Non-fire retardant. Use our Flame retardant Proguard Protection Board when this is a requirement.
- Product may become slippery when wet. Mop up any spills immediately or replace where necessary.
- Not suitable for protection against heavy traffic i.e.. Scissor-lifts. We recommend our Proguard Bufferboard for this application.

Application:

Ensure surfaces onto which Proguard Corrugated Card Protection Board is to be laid are free from loose rubble. Beginning from the corner of the room lay the sheets side by side using Proguard Tuffboard Tape when joining the boards. Use Proguard Low Tack PVC tape when adhering to sensitive surfaces such as marble and glass. To ensure a completely residue-free removal we recommend using Proguard Ultra Low Tack tape.

Performance Data:

Material	B125TT (125T B 125T)
BCT Strength	139.0 Kgf
Recyclability	100%
Recycled Content	100%