




The Batten LED Fittings are an ideal replacement for fluorescent batten fittings, are the same size as the fluorescent fittings so reduce the need for redecoration and save up to 70% on energy costs.

LED

10W-60W
220-240V
IP40

Specification

- LED:** 2835 SMD LED
- Material:** Powder coated metal body and polycarbonate diffuser
- Lumen Output:** 1045-6000lm
- Colour Temperature:** 4100K
- Guarantee:** 3 Years
- Life Expectancy:** 50,000 Hours
- Working Temperature:** -15°C - 45°C
- Ra:** >80
- Extra Information:**

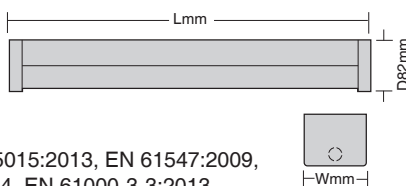

Complies to EN 55015:2013, EN 61547:2009, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 60598-1:2008+A11:2009, EN 60598-2-1:1989, EN 61347-1:2008+A1:2011+A2:2013, EN 61347-2-13:2006, EN 62031:2008+A1:2013, EN 62471:2008, EN 62493:2010 & RoHS

Emergency versions available in Twin 40W, 50W and 60W

Free from mercury and other hazardous materials
 Instant start, flicker free, maintenance free
 Integrated LED Board
 Low heat output
 White base and opal diffuser

MODEL	SINGLE / TWIN	WATTAGE	LUMEN OUTPUT	EMERGENCY	DIMENSIONS (L x W x D mm)
BF210W-1	SINGLE	10W	1045lm	NO	620 x 69 x 82
BF420W-1	SINGLE	20W	1889lm	NO	1230 x 69 x 82
BF440W-1	TWIN	40W	3750lm	NO	1230 x 109 x 82
BF530W-1	SINGLE	30W	2526lm	NO	1530 x 69 x 82
BF550W-1	TWIN	50W	4900lm	NO	1530 x 109 x 82
BF630W-1	SINGLE	30W	3030lm	NO	1795 x 69 x 82
BF660W-1	TWIN	60W	6000lm	NO	1795 x 109 x 82