

SPECIFICATION SHEET



LED 26W ULTRA EFFICIENT PANELS

The ultra-efficient LED 26W Panel offers 115lm/w performance and provides significant energy saving and rapid payback on investment.

Applications:

• Commercial sites • Educational providers • Offices




Image shown LEDP26-40


Specification

LED:	132pcs of SANAN 4014
Material:	Aluminium / PMMA
Lumen Output:	3000lm
Guarantee:	5 Years
Life Expectancy:	50,000 Hours
Working Temperature:	-20°C - 50°C
Power Factor:	>0.9
Beam Angle:	120°
CRI:	80 Ra

Additional Information

- Dimmable driver (LEDDRIVER36D) available.
- Emergency conversion kit (EMLEDKIT2 / EMLEDKIT3) available.
- EMLEDKIT2 - 230lm in emergency mode.
- EMLEDKIT3 - 346lm in emergency mode.
- Lifud flicker free driver included.
- Recessed Mounting Bracket (LEDP-RMKW) available.
- Surface Mounting Kit (LEDP-SMKW) available.
- White finish.

Dimensions

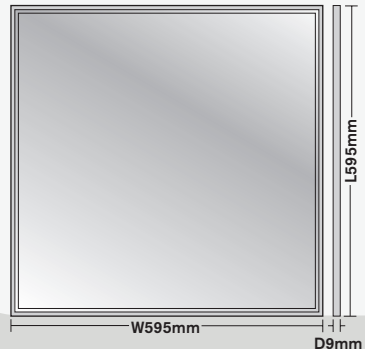

Code	Colour Temperature	Dimensions (L x W x D mm)
LEDP26-40	4000K	595 x 595 x 9
LEDP26-60	6000K	595 x 595 x 9
LEDP26-DRIVER	N/A	130 x 40 x 30