



The LED 70W LITEMODs have a life expectancy of 50,000 hours, a lumen output of up to 5900lm's and can be fitted to a standard 15mm or 25mm suspended "T" grid ceiling. Dimming and Corridor Function option available.



Specification Sheet - LED 70W LITEMODS




Specification

Voltage: 85-265V
Wattage: 70W
Lamp: LED
Chipset: 360pcs of SMD 2835 LED
Lumen Output: 5700-5900lm
Life Expectancy: 50,000 hours
Guarantee: 3 year
IP Rating: IP40
Beam Angle: 160°
Material: Aluminium frame, PMMA diffuser, aluminium heat sink back

Working Temp: -20°C - 40°C
CRI: >80

Extra Info: c/w driver. Edge lit on two sides to avoid 'dark spots'. Surface mounting kit available (LEDP-SMKW12). Easy 'plug & play' emergency solution using EMLEDKITND, EMLEDKIT-MP or EMLEDKIT-SP. If an emergency panel is required in conjunction with a surface mounting kit (LEDP-SMKW12) use EMLEDKIT-SP due to space restriction.

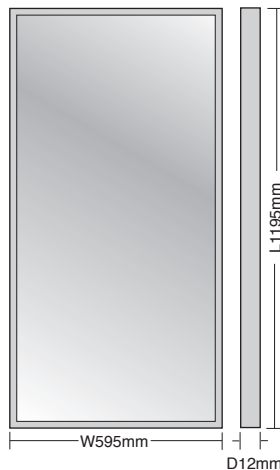

MODEL	WATTAGE	COLOUR TEMPERATURE	LUMEN OUTPUT	DIMENSIONS (L x W x D mm)
LEDPE70-41	70W	4100K	5700lm	1195 x 595 x 12
LEDPE70-64	70W	6400K	5900lm	1195 x 595 x 12
LEDP-SMKW12	Surface Mounting Kit White 1200 x 600mm			
LEDDRIVER100D	Tridonic LED Driver DALI / Swtich Dim / Corridor Function			