




STELLAR TILT

3CCT FIRE RATED TILT DOWNLIGHT

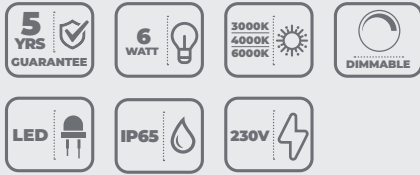

Stellar Tilt extends the popular Stellar range, with the addition of tilt adjustment. From highlighting art to washing walls, this fire rated downlight features 3CCT selectable colour appearance, which can be changed without removing the fitting from the ceiling, plus a wide range of optional colour finish bezels in round and square format.



Features


- Elegant tilting inner bezel for directional light
- 3CCT colour selectable - 3000K, 4000K & 6000K, operated from below the ceiling
- Fire rated to EN1365-2:2014 / BS476-21:1987 for standard timber and i-joist construction
- Acoustic rating designed to meet ISO10140 - 2 : 2010
- Optional circular and square interchangeable bezels
- Tool-free plug & socket connection



Specification

Material:	Housing: Steel Bezel: Polycarbonate
Colour Temperature:	3CCT Selectable 3000K / 4000K / 6000K
Colour Finish	White RAL9003. Other bezel colours available to separate order
CRI	Ra>80
LED Lifetime:	L70B50 50,000 Hrs
IP Rating:	IP65 (From below ceiling)
Working Temperature:	-20°C to 40°C
Beam Angle:	40°
Power Factor	0.9
Electrical Class	Class II
Guarantee:	5 Years

Dimensions

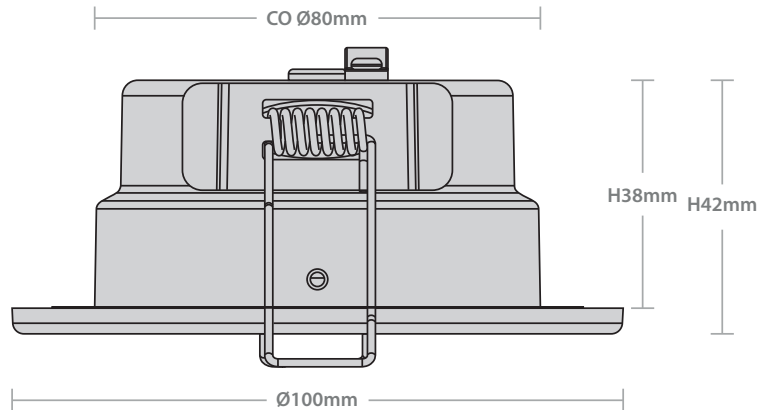

Product Code	Description	Wattage	Lumen Output	Barcode	Efficacy	Weight (Kg)
SR/T/W	Stellar Tilt FR Downlight IP65 White 6W 3CCT 3000/4000/6000K	6W	600lm	5055807624800	100 lm/W	0.35
SRB/T/B	Stellar Tilt Black Bezel Attachment	-	-	5055807624817	-	0.02
SRB/T/C	Stellar Tilt Chrome Bezel Attachment	-	-	5055807624824	-	0.02
SRB/T/SC	Stellar Tilt Satin Chrome Bezel Attachment	-	-	5055807624831	-	0.02
SRB/T/PB	Stellar Tilt Polished Brass Bezel Attachment	-	-	5055807624848	-	0.02
SRB/T/SQW	Stellar Tilt Square White Bezel Attachment	-	-	5055807624855	-	0.025
SRB/T/SQB	Stellar Tilt Square Black Bezel Attachment	-	-	5055807624862	-	0.025
SRB/T/SQC	Stellar Tilt Square Chrome Bezel Attachment	-	-	5055807624879	-	0.025
SRB/T/SQSC	Stellar Tilt Square Satin Chrome Bezel Attachment	-	-	5055807624886	-	0.025
SRB/T/SQPB	Stellar Tilt Square Polished Brass Bezel Attachment	-	-	5055807624893	-	0.025


Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	2.5	2.5	1.5	1.5	2.5	2.5
SR/W/T	120	200	260	320	400	200	260	320	400


Compatible Dimmers

Varilight V-PRO JQP401W	Please contact Red Arrow Technical Department for further details.
Varilight V-COM MKP400	
MK KI523LV	
BG DM400AP	

WITH 3CCT COLOUR OPTIONS:
3000K, 4000K & 6000K OPERATED FROM BELOW THE CEILING

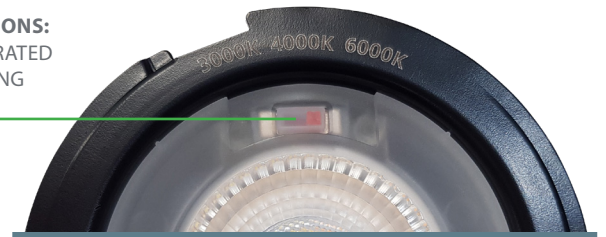

Light Distribution Curve

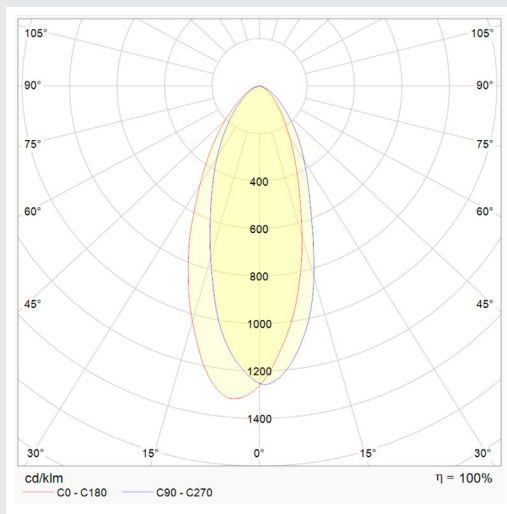

www.redarrowelectrical.co.uk

ENERGY

Red Arrow
SR/T/W

A
B
C
D
E
F
G

6 kWh/1000h

2021 No. 1095