

SPECIFICATION SHEET



110V LED BASTION SITE NON-CORROSIVE FITTINGS

Applications

- Site Lighting



Image shown SNCF420


Specification

LED:	96-192pcs of 0.2W SMD 2835 / 168pcs of 0.5W SMD 2835
Material:	ABS and polycarbonate
Lumen Output:	1800-4500lm (180lm - 450lm in emergency mode)
Colour Temperature:	4000K
Guarantee:	2 Years
Life Expectancy:	30,000 Hours
Working Temperature:	-10° - 40°C (0° - 40°C in emergency)
Power Factor:	0.5 / 0.9
Beam Angle:	120°
CRI:	80 Ra

Additional Information

- 90lm/W • Accessory pack included. • Fast fit connector included.
- Hanging bracket included. • Ni-Cd Battery included in the emergency versions. • Opal diffuser • 20mm gland sizes • Painted metal LED tray included. • Plastic clips included. • Yellow finish

Dimensions

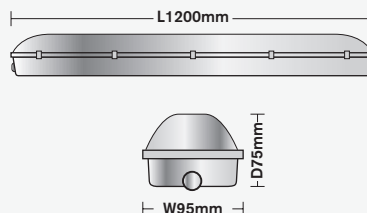

Code	Wattage	LED Qty	Emergency	Lumen Output	Power Factor	Dimensions (L x W x D mm)
SNCF220	20W	96pcs of 0.2W	No	1800lm	0.5	600 x 95 x 75
SNCF220E	20W	96pcs of 0.2W	Yes	1800lm	0.5	600 x 95 x 75
SNCF420	20W	144pcs of 0.2W	No	1800lm	0.5	1200 x 95 x 75
SNCF420E	20W	144pcs of 0.2W	Yes	1800lm	0.5	1200 x 95 x 75
SNCF525	25W	192pcs of 0.2W	No	2250lm	0.9	1500 x 95 x 75
SNCF525E	25W	192pcs of 0.2W	Yes	2250lm	0.9	1500 x 95 x 75
SNCF550	50W	168pcs of 0.5W	No	4500lm	0.9	1500 x 95 x 75
SNCF550E	50W	168pcs of 0.5W	Yes	4500lm	0.9	1500 x 95 x 75