




T20 LED WORK LIGHT

60W / 100W / 150W

M8 Screw Hole

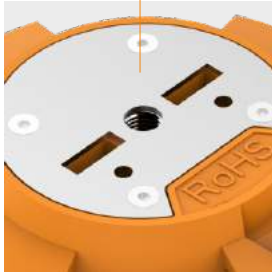


Universal Standard
110v or 230v Plug Options




Specifications

Power	LED Chip	PF	CRI	Voltage	CCT	Lumen	Size (mm)	Operating Temp (°C / °F)	Beam Angle	Weight	Certificate	Equal to
60W±10%	LUMILEDS 2835	≥ 0.9	≥ 80	100-277VAC 50-60Hz	3000-6000K	7200±10%	130 x 233mm	-30~60°C -22~140°F	360°	NW: 1.26 KG GW: 2.0 KG	LM80 CUL UL LM79	200W
100W±10%	LUMILEDS 2835	≥ 0.9	≥ 80	100-277VAC 50-60Hz	3000-6000K	12000±10%	130 x 278mm	-30~60°C -22~140°F	360°	NW: 1.66 KG GW: 2.4 KG	LM80 CUL UL LM79	400W
150W±10%	LUMILEDS 2835	≥ 0.9	≥ 80	100-277VAC 50-60Hz	3000-6000K	18000±10%	130 x 308mm	-30~60°C -22~140°F	360°	NW: 1.94 KG GW: 2.7 KG	LM80 CUL UL LM79	600W


Features

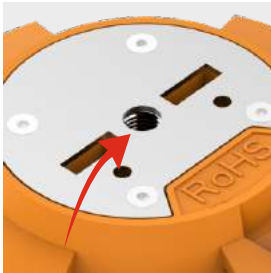


M8 screw hole for the eyebolt and tripod.




High elasticity PC to protect the bottom of the case.

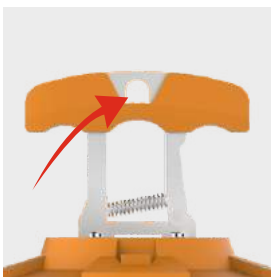

Hole to hang the handle to the fixture.

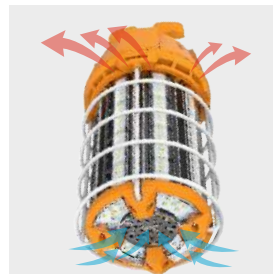


Air convection design.


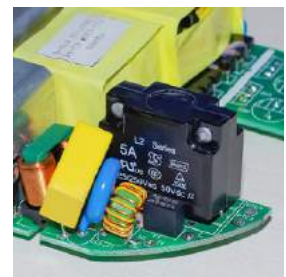


5A Smart Fuse.


Dimensions

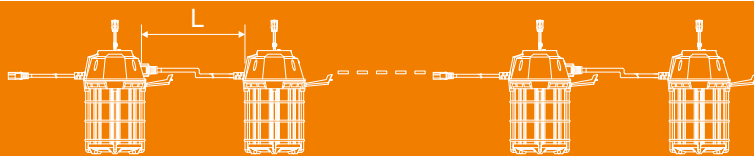


Standard Cable Length
1.8 Metres



60W



100W




150W

Applications



Packing

Power	Inner Box Size (mm)	N.W per Lamp (KG)	G.W per Box (KG)	G.W per Carton (KG)	Carton size (mm)	Quantity per Carton
60W	273 x 210 x 173mm	1.26 KG	2.00 KG	8.10 KG	288 x 435 x 361mm	4 pcs
100W	318 x 200 x 173mm	1.66 KG	2.40 KG	9.90 KG	333 x 415 x 361mm	4 pcs
150W	348 x 200 x 173mm	1.94 KG	2.70 KG	11.0 KG	363 x 415 x 361mm	4 pcs

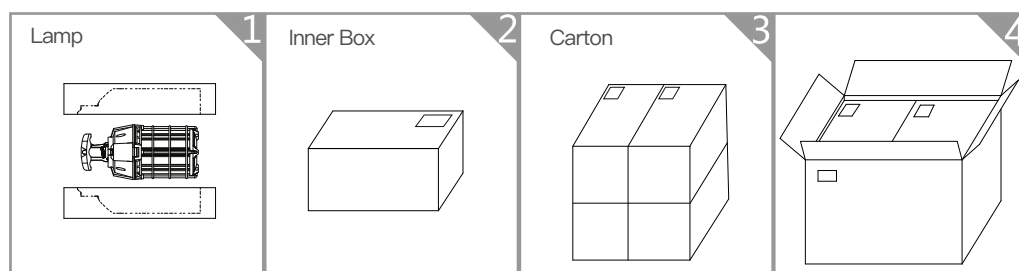

WARNING

- * Risk of electric shock. Do not use where directly exposed to water.
- * Do not tamper with the light housings.
- * Read instructions before use.



WHISAFE[®]
GUARD

Please contact us on:
T. +44 (0) 1753 325 101
or : info@whisafeguard.com