

8669

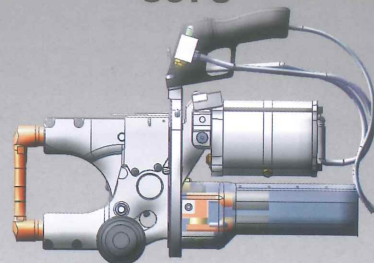

FORCE
450
 daN

GYRO
360°
SCOPE

8677


FORCE
240
 daN

8678

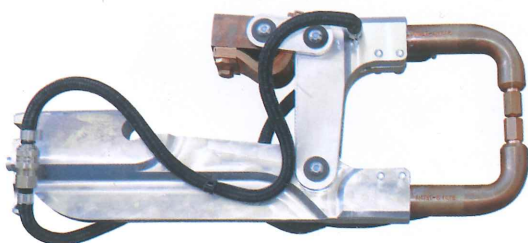

FORCE
610
 daN

GYRO
360°
SCOPE
DATI TECNICI
TECHNICAL FEATURES
DATOS TÉCNICOS

	3650ECF20
Tensione d'alimentazione Supply voltage - Fuente de alimentación	*400 VACx3~50 Hz
Protezione di rete (ritardati) Mains protection (delayed) / Protección principal (retardados)	35 A - ritardato delayed - retardado
Potenza nominale 50% ED Nominal Power 50% ED / Potencia nominal al 50% ED	25 kVA
Potenza massima di saldatura Maximum welding power / La potencia máxima de soldadura	125 kVA
Corrente secondaria massima Maximum secondary current / Corriente secundaria máxima	9000 A
Corrente termica 100% Thermal current 100% / Corriente térmica 100%	1,25 kA
Tensione a vuoto secondaria No load secondary voltage / Voltaje de circuito abierto secundaria	15 V
Tempo di saldatura Weld time / Tiempo de soldadura	0,01 ÷ 2 s
Peso Weight / Peso	150 kg

* Altre tensioni e frequenze a richiesta - * Different voltages and frequencies on demand - * Otras tensiones y frecuencias, bajo pedido

8691



7639


 (A RICHIESTA)
 (ON DEMAND)
 (A SOLICITUD)

8680/Pack01



8688/W/S



8689



5223/W



5230T



5220/WP

8680/Pack02



8686/W/S



5221/2

5221/3



5240/W