

Technical data sheet

**FRUL
SIDER**

SIMPSON
StrongTie

VF Concrete Screw

VF is a concrete screw Ø7.5 mm for the assembly of window and door frame elements designed for fixings in various building materials.

Features

Benefits

- Ideal for stand-off fixings
- Allows fixings near the edge
- Small hole diameter
- Prevents deformation of the frame

Applications

Material


- Steel
- White zinc plated

Applications

- Window and door frames
- Wood profiles and battens
- Connectors

Suitable for

- Non-cracked concrete
- Solid brick
- Honeycomb brick (partially suitable)
- Aerated concrete (partially suitable)
- Solid stone (partially suitable)
- Wood



VF Concrete Screw

Technical Data

Product Dimension - Cylindrical Head Screw


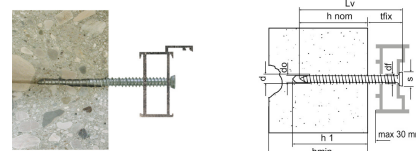


Table "Product Dimension - Cylindrical Head Screw" cannot be displayed : no references available.

Product Dimension - Countersunk Head Screw

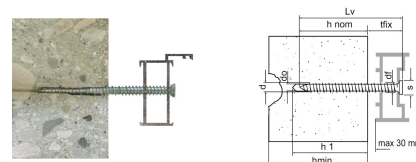

References	Product Reference	Dimensions [dxL _v] [mm]	Hole diameter [d _o] [mm]	Hole diameter in fixture [d _f] [mm]	Head diameter [s] [mm]	Nominal embedment depth [h _{nom}] [mm]	Fixture thickness [t _{fix}] (1) [mm]	Min. hole depth [h ₁ >] [mm]	Min. support thickness [h _{min}] [mm]	Bit
19419B0704000	VF	Ø7,5x40	6	6.2	11.5	30	10	40	60	T-30
19419B0706000		Ø7,5x60	6	6.2	11.5	30	30	40	60	T-30
19419B0707000		Ø7,5x70	6	6.2	11.5	30	40	40	60	T-30
19419B0708000		Ø7,5x80	6	6.2	11.5	30	50	40	60	T-30
19419B0709000		Ø7,5x90	6	6.2	11.5	30	60	40	60	T-30
19419B0710000		Ø7,5x100	6	6.2	11.5	30	70	40	60	T-30
19419B0712000		Ø7,5x120	6	6.2	11.5	30	90	40	60	T-30
19419B0713500		Ø7,5x135	6	6.2	11.5	30	105	40	60	T-30
19419B0715000		Ø7,5x150	6	6.2	11.5	30	120	40	60	T-30
19419B0718000		Ø7,5x180	6	6.2	11.5	30	150	40	60	T-30
19419B0721000		Ø7,5x210*	6	6.2	11.5	30	180	40	60	T-30
19419B0724000		Ø7,5x240*	6	6.2	11.5	30	210	40	60	T-30

(1) Max fixing thickness refers to installation on concrete

* Size not covered by CE certification

VF Concrete Screw

Recommended loads / for single anchors 1)

References	Product Reference	Dimensions [dxL _v] [mm]	Recommended loads ¹⁾ for single anchor								Max torque ⁵⁾ [Tmax] [Nm]
			Concrete C20/25 ²⁾		Solid brick ²⁾ f _{bk} ≥ 20 N/mm ²		Honeycomb brick (Bimattone) ²⁾ f _{bk} ≥ 10 N/mm ²		Pine-wood ³⁾ ρ _k = 450kg/m ³		
			N _{rec} [kN]	V _{rec} [kN]	N _{rec} [kN]	V _{rec} [kN]	N _{rec} [kN]	V _{rec} [kN]	N _{rec} [kN]	V _{rec} [kN]	
19419B0709000	VF	Ø7,5x90	1.5	1.5	1.3	1.5	0.1	0.3	1.1	-	20
19419B0710000	VF	Ø7,5x100	1.5	1.5	1.3	1.5	0.1	0.3	1.1	-	20
19419B0713500	VF	Ø7,5x135	1.5	1.5	1.3	1.5	0.1	0.3	1.1	-	20
19419B0715000	VF	Ø7,5x150	1.5	1.5	1.3	1.5	0.1	0.3	1.1	-	20
19419B0718000	VF	Ø7,5x180	1.5	1.5	1.3	1.5	0.1	0.3	1.1	-	20

1) The allowable loads Nzul / Vzyl were determined from the average values of the breaking loads, taking into account a safety factor γ = 4 (γ = 5 for vertically perforated bricks). Design and dimensioning shall be carried out in accordance with the Friulsider design guide.

2) Anchoring base without plaster layer.

concrete: h_{nom} = 30mm

solid masonry: h_{nom} = 40mm

honeycomb brick (Bimattone): h_{nom} = 60mm





3) Pine wood average gross density ρ_k = 450 kg/m³ / moisture content approx. 12 % / fiber direction α > 30°.

Pine wood: h_{nom} = 40mm

5) The installation torque must be adjusted according to the type of installation and the anchoring base.

VF Concrete Screw

Installation



Winchester Road Cardinal Point Tamworth Staffordshire B78 3HG
tel: +44 1827 255600
fax: +44 1827 255616

Copyright by Simpson Strong-Tie®
Information presented on this document is the exclusive property of Simpson Strong-Tie®
It is valid only when associated with products supplied by Simpson Strong-Tie®

VF
Concrete Screw



www.strongtie.co.uk

**FRiUL
SiDER****SIMPSON**
Strong-Tie

2025-11-20