




WEATHERGUARD PLUS+

NON-CORROSIVE FITTINGS

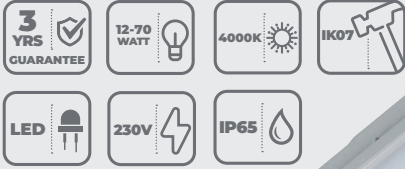

Weatherguard Plus takes IP65 corrosion resistant luminaires to the next level. The range features high efficiency 100 lm/W LEDs and stainless steel clips. The driver & LEDs are replaceable at the end of life, making a more environmentally friendly fitting.


Features

- Unique plug-in replaceable LED strips
- High efficacy - 100 lm/W
- Stainless steel clips included as standard
- Strong corrosion resistant IP65 housing
- Integral microwave sensors available

Specification

Material:	Body & Diffuser: Polycarbonate Retaining Clips: Stainless Steel
Colour Temperature:	4000K
Colour Finish:	Grey
CRI:	Ra>80
LED Lifetime:	L70B50 30,000 Hours
IP Rating:	IP65
IK Rating:	IK07
Working Temperature:	-25°C to 40°C (Emergency version 0°C to 40°C)
Emergency Battery Type:	Ni-Cd
Electrical Class:	Class I
Power Factor:	0.9
Guarantee:	3 Years (Emergency batteries 1 year)

Dimensions

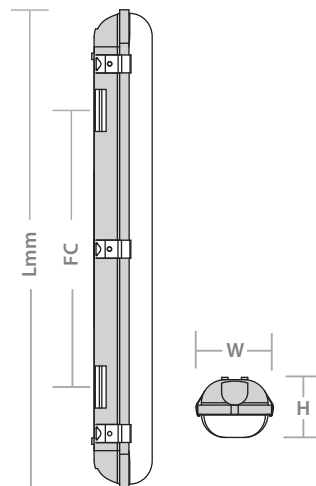




Product Code	Dimensions	Fixing Centres FC
WGP212	L: 664 x W: 103 x D: 78mm	400mm
WGP224	L: 664 x W: 103 x D: 78mm	400mm
WGP224-E	L: 664 x W: 103 x D: 78mm	400mm
WGP425	L: 1262 x W: 72 x D: 78mm	900mm
WGP425-E	L: 1262 x W: 72 x D: 78mm	900mm
WGP450	L: 1262 x W: 103 x D: 78mm	900mm
WGP450-E	L: 1262 x W: 103 x D: 78mm	900mm
WGP535	L: 1562 x W: 72 x D: 78mm	1200mm
WGP535-E	L: 1562 x W: 72 x D: 78mm	1200mm
WGP570	L: 1562 x W: 103 x D: 78mm	1200mm
WGP570-E	L: 1562 x W: 103 x D: 78mm	1200mm

Product Code	Description	Wattage	Lumen Output	Emergency Lumen Output	Efficacy	Net Weight (kg)	Barcodes
WGP212	Weatherguard Plus 600mm	12W	1200 lm	-	100 lm/W	0.8	5055807621298
WGP224	Weatherguard Plus 600mm	24W	2400 lm	-	100 lm/W	0.75	5055807621304
WGP224-E	Weatherguard Plus 600mm with 3Hr Emergency	24W	2400 lm	180 lm	100 lm/W	1.08	5055807621311
WGP425	Weatherguard Plus 1200mm	25W	2500 lm	-	100 lm/W	1.25	5055807621328
WGP425-E	Weatherguard Plus 1200mm with 3Hr Emergency	25W	2500 lm	180 lm	100 lm/W	1.58	5055807621335
WGP450	Weatherguard Plus 1200mm	50W	5000 lm	-	100 lm/W		5055807621342
WGP450-E	Weatherguard Plus 1200mm with 3Hr Emergency	50W	5000 lm	360 lm	100 lm/W	1.9	5055807621359
WGP535	Weatherguard Plus 1500mm	35W	3500 lm	-	100 lm/W	1.4	5055807621151
WGP535-E	Weatherguard Plus 1500mm with 3Hr Emergency	35W	3500 lm	180 lm	100 lm/W	1.75	5055807621168
WGP570	Weatherguard Plus 1500mm	70W	7000 lm	-	100 lm/W	1.8	5055807621175
WGP570-E	Weatherguard Plus 1500mm with 3Hr Emergency	70W	7000 lm	450 lm	100 lm/W	2.25	5055807621185

Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	2.5	1.5	1.5	1.5	2.5
WGP212	56	112	112	112	182	112	112	112	182
WGP224	28	56	56	56	91	56	56	56	91
WGP224-E	28	56	56	56	91	56	56	56	91
WGP425	28	56	56	56	91	56	56	56	91
WGP425-E	28	56	56	56	91	56	56	56	91
WGP450	14	28	28	28	44	28	28	28	44
WGP450-E	14	28	28	28	44	28	28	28	44
WGP535	21	42	42	42	70	42	42	42	77
WGP535-E	21	42	42	42	70	42	42	42	77
WGP570	9	19	19	19	35	19	19	19	35
WGP570-E	9	19	19	19	35	19	19	19	35

Light Distribution Curve

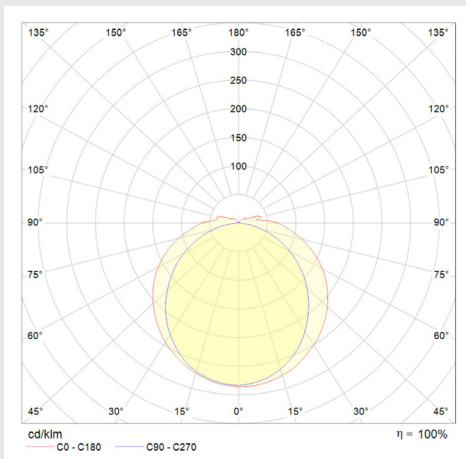

www.redarrowelectrical.co.uk