


Scaffolding & Barrier Safety Light

WHI Safeguard's innovative lighting solution is designed to fit quickly and securely to all types of scaffolding and other industrial applications with optional side or vertical brackets.

The product provides a simple, robust and tamperproof solution to the increasing need to clearly illuminate scaffolding and construction areas.

This photocell activated product provides 360 degree flashing light with prolonged battery life, particularly during the summer months when you are likely to leave the job before it gets dark and will be light before you get back the next day.

+ Side & Vertical Bracket Options

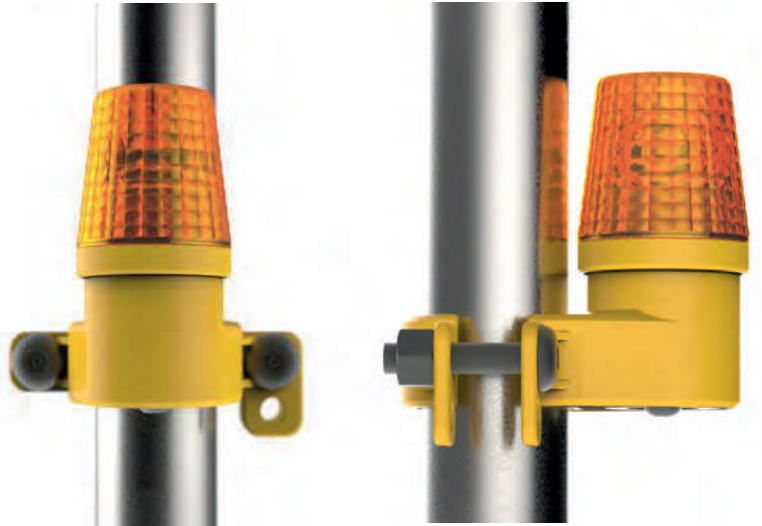

Product Ref. SBL1403

Voltage & Output

- * Uses 2 x AA Standard Batteries (not included)
- * Battery Life - 4 Months Flashing / 2 Months Static
- * Illumination Type - LED x 4, yield of minimum 1100 mCd
- * Flash Pattern - 30 Per Minute, (single flash)
- * Duration of Flash 200 Milli seconds

Product Ref. SBL1404



Specification

- + 360 Degree polycarbonate amber lens option for maximum visibility
- + Integrated photocell (Activated by darkness)
- + Alternate on/off switch
- + Mounting bracket included (2 purchase options)
- + Robust polycarbonate suitable for industrial applications
- + Hexagon security screws (Tool provided)
- + Easily installed or moved with use of mounting brackets
- + Sealed against dust and water



+ For further information
please contact us on:
info@whisafeguard.com



268 Bath Road, Slough, Berkshire, SL1 4DX.

T. +44 (0) 1753 325 101 www.whisafeguard.com

Materials & Dimensions

- + Polycarbonate impact resistant
- + Colour - Yellow
- + Lens colour amber, other colours on request
- + Side bracket: 45mm x 118mm x 75mm
- + Vertical bracket: 60mm x 118mm x 65mm
- + Light module (Standard): 106mm x 65mm x 36mm

Shipping (Excluding Batteries)

- + Side bracket & light 200g
Packaged 365g (left)
- + Vertical bracket & light 202g
Packaged 350g (right)

