

EASYJoint

- ✓ Can be used in wet or dry weather conditions.
- ✓ Workable at low temperatures.*
- ✓ Ready mixed for ease of use.
- ✓ No specialist tools required.
- ✓ Very quick and easy to apply.
- ✓ No bending or kneeling required.
- ✓ No waste! Unused product can be stored for later use.
- ✓ Pressure washer resistant.
- ✓ Water permeable.
- ✓ Inhibits weed growth.
- ✓ Dries and remains incredibly hard.
- ✓ Suitable for natural stone, concrete paving, cobbles, sets and virtually all other outdoor paving surfaces with joints in excess of 3mm wide and 25mm deep.
- ✓ Up to 3 tonne loading capability.
- ✓ Environmentally friendly including packaging - cement free.
- ✓ Choice of four colours, Buff Sand, Stone Grey, Basalt and Terracotta.

* Refer to www.easyjoint.eu for more information.

GENERAL INFORMATION AND PRECAUTIONS

Follow the instructions on the **EASYJoint** container and our website carefully. We strongly recommend that you download from the website the detailed instructions on how to use **EASYJoint**, especially if you are using it for the first time.

The company cannot be aware of all the applications and materials the product may be used with. **It is the user's responsibility to determine suitability for use.**

Always use plenty of water both before and during the application process particularly when working with porous and absorbent materials such as Sandstone and Limestone.

If used in accordance with the instructions, the product should not affect the aesthetic properties of the material on which it is used but no guarantee of this is given or implied. Neither the manufacturer nor supplier accepts any liability for any changes in the appearance of the paving resulting from the use of **EASYJoint**.

If in any doubt test a sample before use. Refer to www.easyjoint.eu for more detailed precautionary advice and other general information.

Your local supplier

Azpects Limited, Grange Works,
22 Falkenham Road, Kirton, Suffolk, IP10 0NW
Email: info@azpects.co.uk or info@easyjoint.eu

Azpects


EASYJoint

The all weather
jointing compound.


Rain or shine it goes in fine.




Ready to use
Simple to apply
Professional or DIY use
Environmentally friendly
Choice of colours



Buff Sand



Stone Grey



Basalt



Terracotta

EASYJoint

Why use it?




So Easy to Use

That's why it's called **EASYJoint**. Perfect for DIY or Professional use.




Extremely Quick

Up to 20 times faster to use than conventional methods of jointing.

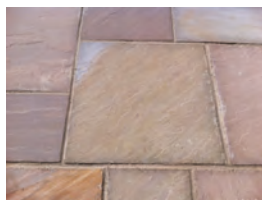

Aesthetically Pleasing

A choice of four colours to match your paving - Buff Sand, Stone Grey, Basalt and Terracotta.

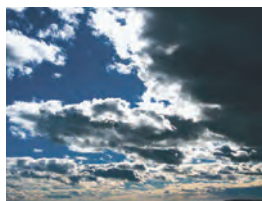

Weather will not stop play!

A big plus for professionals; extends the working season, aids project planning and improves cash flow - no going back to finish the job.



No Waste

Opened but un-used product can be stored for later use (subject to conditions).



Outstanding performance

Quite simply, there is not an easier or better option for jointing pedestrian and light vehicular areas.

BRIEF INSTRUCTIONS FOR USE

This is a brief overview of how to work with **EASYJoint**. Don't rely on this information alone. Detailed instructions are on the reverse of the product tubs and on the website, www.easyjoint.eu




1. Saturate the paving with water for several minutes before you start.

The wetter the better. Don't shortcut this process, particularly if working with porous and absorbent natural materials.



2. Pour out small quantities of **EASYJoint**, sufficient to work in a few minutes. Work with one bag at a time. Spread it across the surface with a broom, allowing it to fall into the joints.

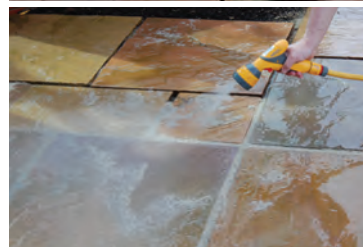

3. After applying one or two bags, use a spray of water to wash the compound into the joints. Don't worry about using too much water - you can't! Remember - **the wetter the better.**



4. Allow the excess water to drain away. Top up any sagging joints with more **EASYJoint** as necessary and repeat the spraying process as described in Step 3 above.



5. Repeat Steps 1, 2, 3 and 4 until all the joints are uniformly filled to about 1-2mm below the surface of the paving. Clear any residue **EASYJoint** as you go by washing with plenty of water. Never allow the surface to dry out with the compound on the surface.



6. OPTIONAL. Once the water has drained and the surface is patchy dry, to achieve a smoother finish to the joint, "point" the compound with a suitable jointing iron or tool. Do not do this when the joint is soaking wet.

7. Once the **EASYJoint** has set hard, sweep the paving diagonally to the joint with a firm/stiff brush to remove any final traces of the compound.

For more detailed instructions and tips on how to use EASYJoint, refer to our website - www.easyjoint.eu

SETTING TIMES

Based on dry weather conditions and temp's. of 20°C and 65% humidity.

Pedestrian Areas

Safe to walk on after approx. 24 hours - fully load bearing after approx. 4 days.

Domestic Driveways

(For vehicles up to 3 tonnes). Keep vehicles off the surface for at least 7 days after it has set.

Notes

EASYJoint continues to strengthen for 3 or more weeks. Do not pressure wash for at least a month after application.

EASYJoint needs dry weather to cure. Cold or wet weather can dramatically increase the setting time - maybe to several days. Don't worry - it will eventually set and the performance of the product will not have been impaired.

COVERAGE TABLE

1 x 12.5Kg Tub of **EASYJoint** will cover approximately the following areas*

Paving Size (mm)	Joint Size (mm) 30 x 5	Paving Size (mm)	Joint Size (mm) 30 x 8
600 x 600	13.5 m ²	600 x 600	8.5 m ²
600 x 450	11.5 m ²	600 x 450	7.0 m ²
450 x 450	10.0 m ²	450 x 450	6.0 m ²
600 x 300	9.0 m ²	600 x 300	5.5 m ²
450 x 300	8.0 m ²	450 x 300	5.0 m ²
300 x 300	7.0 m ²	300 x 300	4.0 m ²
450 x 225	7.0 m ²	450 x 225	4.0 m ²
225 x 225	5.0 m ²	225 x 225	3.0 m ²

* Note: this is only a guide. Because accuracy of gap width and depth cannot be uniformly guaranteed, the above table is only a reasonable estimate of the amount of material required.