


OPERATION

The fan is operated by the ON/OFF switch located in the handle.

The unit may be used for either extracting dirty air or for supplying fresh air, as desired. Simply attach the ducting to the appropriate end of the machine, as shown, secured with the cord attached.

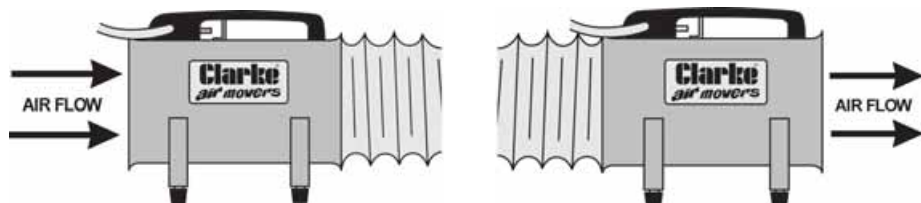

MAINTENANCE

WARNING : Disconnect from mains before attempting any maintenance work.

Periodically clean guards and fan blades by vacuuming or wiping. Remove guard to gain access to blade.

REPLACE ALL GUARDS BEFORE RE-CONNECTING FAN TO MAINS SUPPLY.

SPECIFICATIONS

	CAM200	CAM250	CAM300
Air Inlet Size	8inch	10inch	12inch
Motor	230V~ 50Hz 1Ph	230V~ 50Hz 1Ph	230V~ 50Hz 1Ph
Power Rating	165Watts	250Watts	392Watts
Fuse Rating	13 Amps	13Amps	13Amps
Air Flow	838ft ³ /min	1284 ft ³ /min	2070 ft ³ /min
Net Weight	8.5kg	10kg	15.5kg
Sound Press Level .	76dB(A)	83dB(A)	86dB(A)
Part No.	3230440	3230450	3230460

PARTS AND SERVICE CONTACTS

For Spare Parts and Service, please contact your nearest dealer,
or CLARKE International, on one of the following numbers.

PARTS & SERVICE TEL: 020 8988 7400

or e-mail as follows:

PARTS: Parts@clarkeinternational.com

SERVICE: Service@clarkeinternational.com

Clarke®

air



VENTILLATOR

Model Nos.

CAM200 • CAM250 • CAM300

Part Nos. 3230440 • 3230450 • 3230460

OPERATING & MAINTENANCE INSTRUCTIONS

Thank you for purchasing this CLARKE Ventilator, which is designed for indoor use in an industrial environment.

Please read this leaflet thoroughly and follow the instructions carefully, in doing so you will ensure the safety of yourself and that of others around you, and you can look forward to the Ventilator giving you long and satisfactory service.

GUARANTEE

This CLARKE product is guaranteed against faulty manufacture for a period of 12 months from the date of purchase. Please keep your receipt as proof of purchase.

This guarantee is invalid if the product is found to have been abused or tampered with in any way, or not used for the purpose for which it was intended.

Faulty goods should be returned to their place of purchase, no product can be returned to us without prior permission.

This guarantee does not effect your statutory rights.

SAFETY PRECAUTIONS

Before using the fan, please ensure that you read and observe the following safety rules. It is also important that other people in the vicinity are made aware of, and made to comply with, these rules:-

1. Do not operate the Ventilator with any guards removed.
2. Do not allow loose clothing, long hair, jewellery etc. to be drawn into the intake side of the Ventilator.
3. Keep children and animals away from the Ventilator when in operation.
4. Do not operate in wet/damp environment, and ensure that the unit is not sited where it is possible for water to be drawn into the intake. Be aware that the suction capability is considerable at higher fan speeds.
5. Do not position fan where it will blow dust, chips or hazardous fumes at people in the path of the air flow.
6. Do not exert any strain on the power cable, and check the condition of the cable before operating the fan. Replace if damaged.
7. Disconnect the Ventilator from the power source before moving or attempting any kind of service work whatsoever.
8. Do not operate the Ventilator near flammable liquids or in gaseous or explosive atmospheres.

ELECTRICAL CONNECTIONS

Connect the mains lead to a standard, 240 Volt (50Hz) electrical supply through an approved 13 amp BS 1363 plug, or a suitably fused isolator switch.

WARNING! THIS APPLIANCE MUST BE EARTHED

IMPORTANT: The wires in the mains lead are coloured in accordance with the following code:

Green & Yellow	-	Earth
Blue	-	Neutral
Brown	-	Live

As the colours of the flexible cord of this appliance may not correspond with the coloured markings identifying terminals in your plug proceed as follows:

- Connect GREEN & YELLOW cord to plug terminal marked with a letter "E" or Earth symbol \equiv or coloured GREEN or GREEN & YELLOW.
- Connect BROWN cord to terminal marked with a letter "L" or coloured RED
- Connect BLUE cord to terminal marked with a letter "N" or coloured BLACK

If this appliance is fitted with a plug which is moulded onto the electric cable (i.e. non-rewirable) please note:

1. The plug must be thrown away if it is cut from the electric cable. There is a danger of electric shock if it is subsequently inserted into a socket outlet.
2. Never use the plug without the fuse cover fitted.
3. Should you wish to replace a detachable fuse carrier, ensure that the correct replacement is used (as indicated by marking or colour code).
4. Replacement fuse covers can be obtained from your local dealer or most electrical stockists.
5. The fuse in the plug must be replaced with one of the same rating (**5 amps**) and this replacement must be ASTA approved to BS1362.

We recommend that this machine is connected to the mains supply through a Residual Current Device (RCD).

If in doubt, consult a qualified electrician. Do not attempt any electrical repairs yourself.