




Interflex Hazard

Short Description

Interflex Hazard is a traditional grid welded PVC duckboard matting with high visibility yellow strips down each side for workplace safety for use in industrial and commercial environments where slip hazards exist. The matting is designed to self-drain making it suitable for use in wet areas indoors or outdoors and where oil, grease or chemicals exist.

Product Images

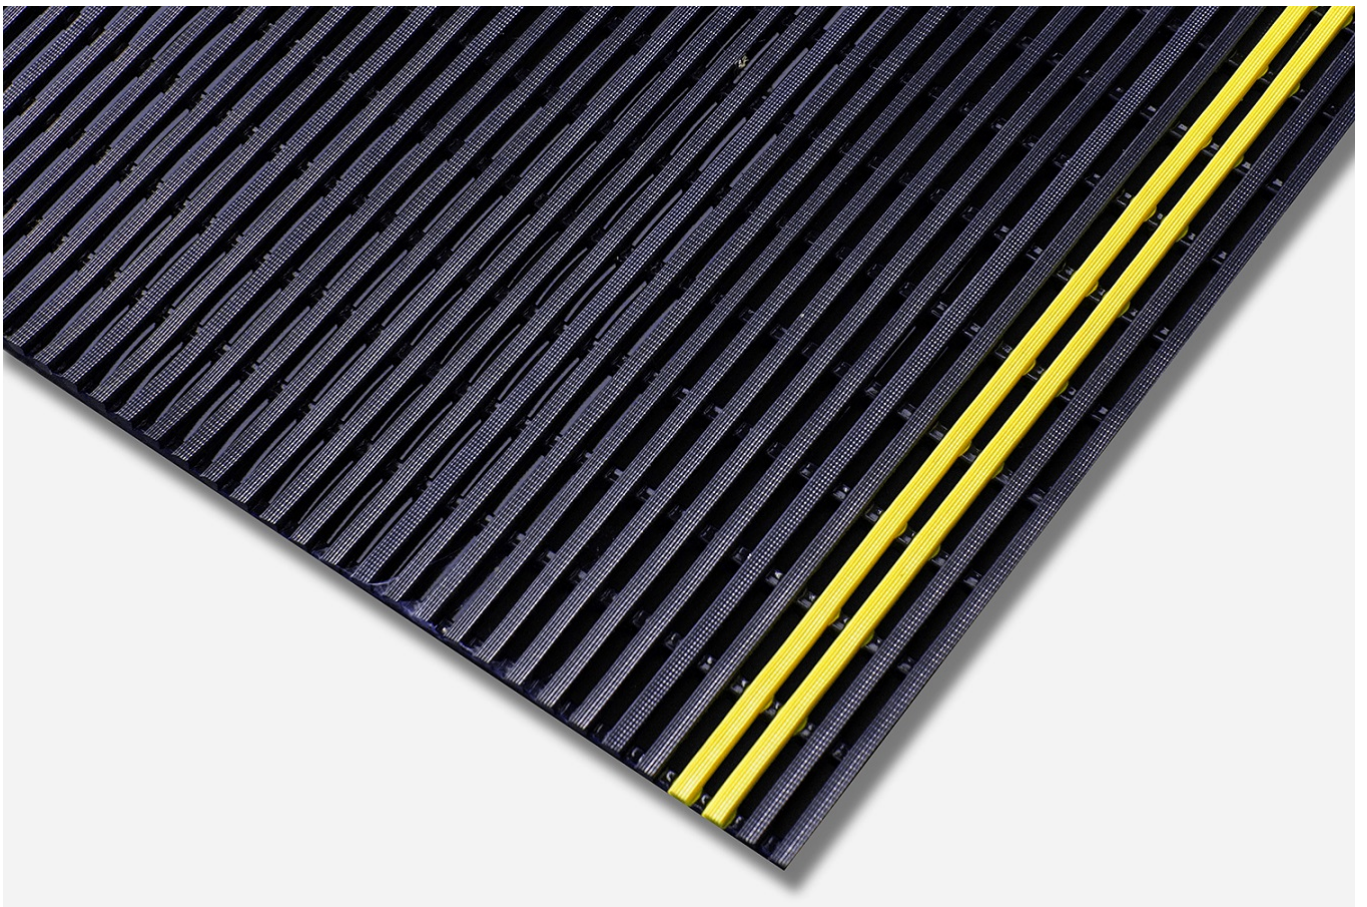

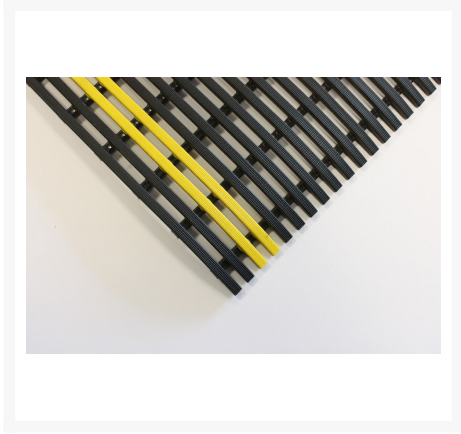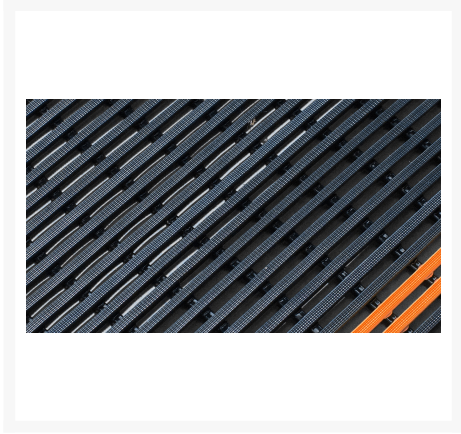

Description

- High visibility yellow strips for workplace safety
- Suitable for medium duty industrial use
- Oil, grease and chemical resistant
- Connector clips available for side or end joining
- Overall height 12.5mm

Additional Information

Specifications

| | |
|---------------------------|---|
| Wear Resistant | Wear resistant surface to Level 3 |
| Anti-Fatigue | Anti-fatigue protection to Level 2 |
| Slip Resistance | Slip resistance Level 2 |
| Chemical Resistant | Chemical resistant |
| Connectable | Mats are connectable and join together |
| Oil Area | Suitable for use in oily and greasy areas |
| Wet Area | Suitable for use in wet areas |

Environment

| | |
|-------------------------|------------------|
| Dry Zone | Dry Zone |
| Wet Zone | Wet Zone |
| Oily/Greasy Zone | Oily/Greasy Zone |
| Chemical Zone | Chemical Zone |

Tests

Temperature resistance -5 °C to +60 °C
Slip resistance Classification R10 to DIN 51130

Product Options

| | |
|---------|-------|
| Length: | 1m |
| | 10m |
| Width: | 60cm |
| | 80cm |
| | 100cm |
| | 120cm |