High quality universal diamond core drilling crowns. Inductively soldered. Universally usable for dry and wet drilling, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed and other

Ø 32-300 mm

REMS Universal diamond core drilling crowns – Inductively soldered. Diamond segments with conical cut for fast, easy and quiet drilling. Versatile for many types of material. Ideal for plumbers.

Universally usable for many materials, for dry and wet drilling, hand held or with drill stand.

Single connecting thread UNC 11/4 female. Drilling depth 420 mm.

Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with conical cut ("roof shape") for fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Drive through all REMS Picus drive machines and suitable drive machines of other makes having connecting thread UNC 1% male. Adapter for using REMS Universal diamond core drilling crowns in drive machines having other connecting threads, as accessory.

Suck off dusts that occur during dry drilling with REMS Pull M safety vacuum cleaner, certified for extracting health hazardous dusts of dust class M (page 304).

Supply format

REMS Universal diamond core drilling crown. Inductively soldered, resolderable. Universally usable for dry and wet drilling, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1½ female. Drilling depth 420 mm. In a carton.


Drilling depth 420 mm. In a carton	l.		
$\emptyset \times drilling depth \times connection$	Number of segments	ArtNo.	
UDKB 32 × 420 × UNC 11/4	4	181010	
UDKB 42 × 420 × UNC 11/4	4	181015	
UDKB 52 × 420 × UNC 11/4	5	181020	
UDKB 62 × 420 × UNC 11/4	6	181025	
UDKB 72 × 420 × UNC 11/4	7	181030	
UDKB 82 × 420 × UNC 11/4	7	181035	
UDKB 92 × 420 × UNC 11/4	8	181040	
UDKB 102 × 420 × UNC 11/4	8	181045	
UDKB 112 × 420 × UNC 11/4	9	181050	
UDKB 122 × 420 × UNC 11/4	10	181055	
UDKB 125 × 420 × UNC 11/4	10	181057	
UDKB 127 × 420 × UNC 11/4	10	181059	
UDKB 132 × 420 × UNC 11/4	11	181060	
UDKB 152 × 420 × UNC 11/4	12	181065	
UDKB 162 × 420 × UNC 11/4	12	181070	
UDKB 182 × 420 × UNC 11/4	12	181075	
UDKB 200 × 420 × UNC 11/4	12	181080	
UDKB 225 × 420 × UNC 11/4	13	181085	
UDKB 250 × 420 × UNC 11/4	14	181090	
UDKB 300 × 420 × UNC 11/4	22	181095	









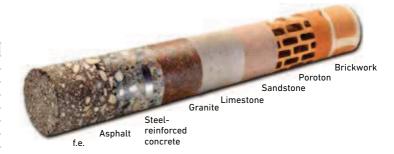



Accessories

Description	ArtNo.
Light loosening ring, for light loosening of the diamond core crown	180015
Drilling crown extension 200 mm	180155
Adapter UNC 1¼ male to G ½ male	180052
Adapter UNC 1¼ male to G ½ female	180056
Adapter UNC 1¼ male for Hilti BI	180053
Adapter UNC 11/4 male for Hilti BU	180054
Sharpening stone for diamond core drilling crowns	079012
Single open ended wrench size 41 for UDKB	079003

Additional adapters for using REMS Universal diamond core drilling crowns LS in drive machines of other makes, on request.

