



INSTRUCTIONS FOR:
**TOOLBOX LIGHT RECHARGEABLE 15 SMD LED
 LITHIUM-ION**
 MODEL NO: **TBL450**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual

1. SAFETY

- x **DO NOT** shine lamp directly into your, other person's or animal's eyes.
- x **DO NOT** allow children to use the lamp.
- ✓ Maintain the lamp in good condition.
- x **DO NOT** use the lamp if the lamp is damaged.
- ✓ When not in use store the light in a safe, dry, childproof location.

2. INTRODUCTION


Robust aluminium housing incorporating 15 SMD LED's to illuminate the trays in a toolbox. With a width of 450mm the light is fitted with two sliding magnetic brackets which can rotate 180° to direct the light as required, whilst also giving the flexibility to attach the light to any ferrous metal avoiding badges and logos. Features two light settings with an operating time of up to 12 hours. Powered by a rechargeable 3.7V 2.2Ah Lithium-ion battery and includes an LED charging indicator. Supplied with a 1mtr USB charging cable.

3. SPECIFICATION

Model no:	TBL450
Battery:	3.7V 2.2Ah Lithium-ion
LED Quantity:	15 SMD LED
Lumen Output High/Low:	150/100lm
Operating Time:	6/12hr
Charging Time:	3hr
Dimensions (W x D x H):	450 x 50 x 30mm

4. OPERATION

- ### 4.1. Charging
- 4.1.1. Insert the mini USB plug into the charger socket adjacent to the on/off switch.
 - 4.1.2. Couple the USB plug on the other end into a 5V USB outlet.
 - 4.1.3. The charge indicator LED will show red whilst charging.
 - 4.1.4. When fully charged, the charge LED will show green. At this point disconnect the light from the power source.
- ### 4.2. Operation
- 4.2.1. The magnetic mounting brackets may be slid along the length of the light and swivelled to provide the required orientation.
 - 4.2.2. The first press of the on/off switch selects the high (150lm) output; the second press selects the lower (100lm) output.
 - 4.2.3. The third press switches the light off.
- ### 4.3. Cleaning
- Clean the light with a damp cloth. **DO NOT** use abrasive or solvent cleaners.

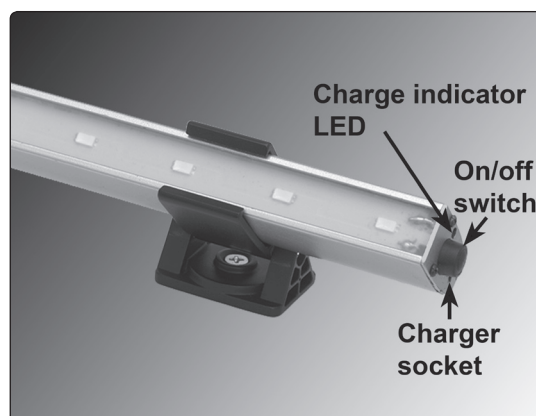



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk