



2-IN-1 BRAKE FLUID TESTER & TYRE PRESSURE GAUGE

MODEL NO: **VS0276**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.

1. INTRODUCTION

Simple-to-read- traffic light system to show moisture levels in the brake fluid. Compatible with DOT 3, DOT 4 and DOT 5.1 brake fluid. Digital tyre pressure gauge with light which can be displayed in bar, psi, kPa and kg/cm². Pressure range 3-150 PSI (0.2-10.4 bar). Bright LED Display, ideal for reading the screen in low light conditions. Powered by 2 x LR44 batteries (supplied)

2. OPERATION

2.1. BRAKE FLUID TESTING

- 2.1.1. Remove the cap from the brake fluid probe.
- 2.1.2. Press the BRAKE FLUID button. The green LED will light.
- 2.1.3. Place the probes of the tester in brake fluid. The LED will indicate the condition of the fluid:
 - Green 0% = Good.
 - Yellow <2% = OK.
 - Red >4% = Bad.


- 2.1.4. Clean the probes with clean water and dry.

2.2. TYRE PRESSURE TESTING

- 2.2.1. Press the TYRE PRESSURE button. Press to cycle between desired units (Bar, PSI, kPa, kg/cm²)
- 2.2.2. Push the pressure gauge onto the tyre valve. Ensure a good seal to prevent air from escaping.
- 2.2.3. The pressure will display on the LCD screen.
- 2.2.4. The tool will automatically power off after 40s. Alternatively hold the TYRE PRESSURE button.

2.3. CHANGING THE BATTERY (FIG.2)

- 2.3.1. Remove the battery cover from the back of the tool (fig.2.1).
- 2.3.2. Remove the batteries and replace with an equivalent. Ensure the batteries are inserted with the correct polarity (fig.2.2).

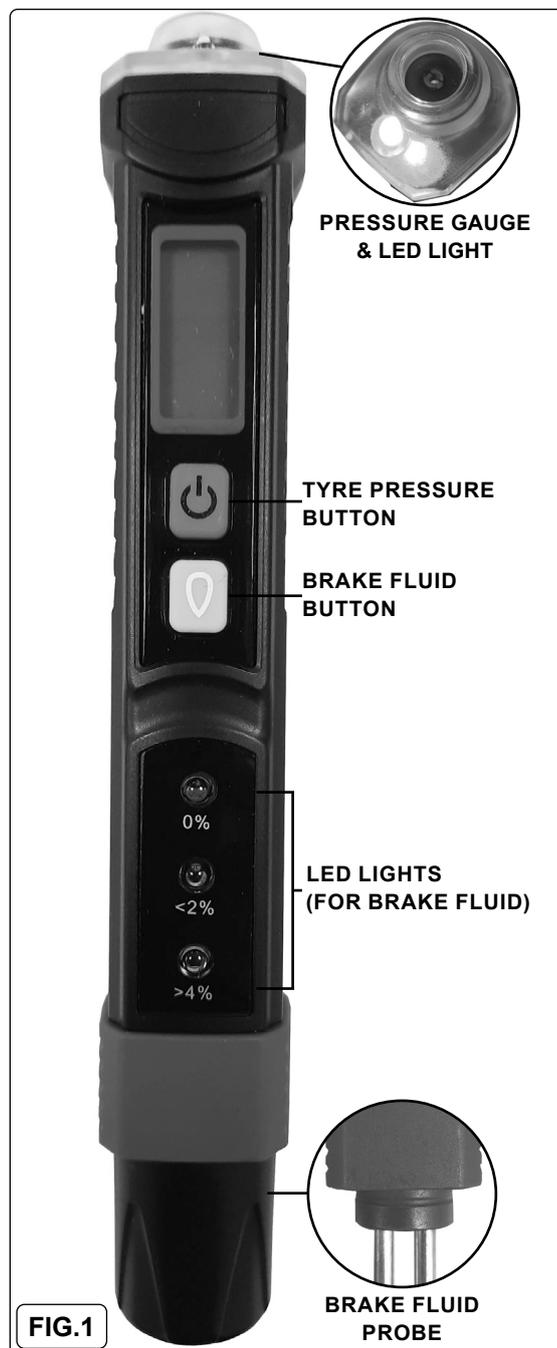



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR PURCHASE HERE



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.



BATTERY REMOVAL

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme. Jack Sealey Ltd Batteries Producer Registration Number (BPRN) is BPRN00705.

Li-ion

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



sales@sealey.co.uk



www.sealey.co.uk