



The A35E anchor's exclusive bending slot allows instant, accurate bending on site for all two and three-way connections. • Balanced, completely reversible design allows the A35E to be used to secure a wide variety of connections.



[UK-DoP-e07/0137](#), [ETA-07/0137](#)

FEATURES




Material

- Pre-galvanised mild steel.

Benefits

- Speed prong holds framing anchor in position to allow easier nailing,
- Exclusive bending slots allow instant, accurate bending on site for all two and three-way ties.
- Balanced, completely reversible design allows the A35E to be used for a wide variety of connections.

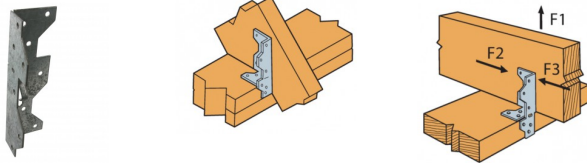



APPLICATIONS

Suitable On

- Wood to wood applications.


TECHNICAL DATA

Product Dimensions



A35E

Connection Type 2



References	Number of Fasteners		Safe Working Loads (Long Term - C16 Timber) [kN]		Characteristic Loads (C24 Timber) [kN]	
	Qty	Specification	F ₁	F ₂	F ₁	F ₂
A35E	12	3.75 x 30	1.3	1.46	1.33	0.89

Connection Type 3

References	Number of Fasteners		Safe Working Loads (Long Term - C16 Timber) [kN]			Characteristic Loads (C24 Timber) [kN]			
	Qty	Specification	F ₁	F ₂	F ₃	F ₁ (Single)	F ₁ (Pair)	F ₂	F ₃
A35E	9	3.75 x 30	0.98	0.64	0.98	0.6	5.26	0.59	0.46

Connection Type 4

References	Number of Fasteners		Safe Working Loads (Long Term - C16 Timber) [kN]			Characteristic Loads (C24 Timber) [kN]			
	Qty	Specification	F ₁	F ₂	F ₃	F ₁ (Single)	F ₁ (Pair)	F ₂	F ₃
A35E	12	3.75 x 30	0.98	0.98	0.57	1.03	5.26	1.14	0.84

Framing anchors must be installed diagonally opposite each other for the higher characteristic capacities for a pair of connectors to be applicable in installations 3 and 4

INSTALLATION

Fixing

Install with 3.75X30mm square twist nails.

Installation

Use all specified fasteners

