




The RR ridge rafter connector provides alignment control and correct nailing locations. The RR may be used with any rafter slope up to 30°. For back-to-back installations, the minimum width of the ridge plate is 38mm.



[UK-DoP-e08/0053](#), [ETA-08/0053](#)

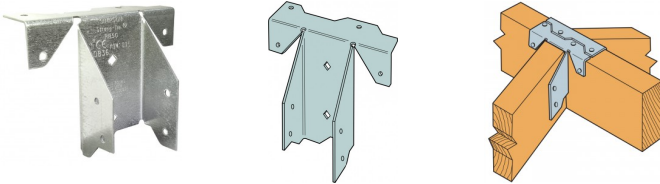


APPLICATIONS

Material

- Pre-galvanised mild steel

TECHNICAL DATA

Product Dimensions



RR

RR47

Performance Values

Table "Performance Values" cannot be displayed : no references available.

