

## Generating Set

### GE 3500 KBM - Petrol

#### Key Features

- Manual recoil
- Engine shut down for low oil level
- Sockets: 1 x 230V 16A, 1 x 110V 16A
- Overload thermal shut off
- Battery charger 12V c.c with fuse protection
- Protective frame
- Silenced
- Portable
- Meets EC directives for noise and safety

#### A.C. Generation - 50Hz - Single Phase, Brushless Alternator

Output *	3.2 kVA (2.9 kW) / 230V / 110V
PRP single-phase power *	2.9 kVA (2.6 kW) / 230V / 110V
Power factor (cos)	0.9
Battery charger	12V c.c
Insulation class	H

\* Output power according to ISO 8528-1

#### Engine - Petrol, 4-Stroke, OHV, Natural Aspirated


Model	Kohler H 270 command pro
Output *	3.6 kW (4.9 HP)
Cylinders / Displacement	1 / 208cm <sup>3</sup>
Speed	3000 rpm
Fuel consumption (75% of PRP)	1.2 l/h

\* Power according to SAE J1349

#### General Specifications

Tank capacity	4 litres
Running time (75% Load)	3.3 hours
IP protection degree	IP 23
Dimensions LxWxH (mm)	650 x 520 x 490
Dry weight	44 Kg
Measured acoustic power LwA (pressure LpA)*	96 dB(A) (71 dB(A))
Guaranteed acoustic power LwA (pressure LpA)*	96 dB(A) (71 dB(A) @ 7m)

\* Acoustic power according to European Directive 2000/14/EC

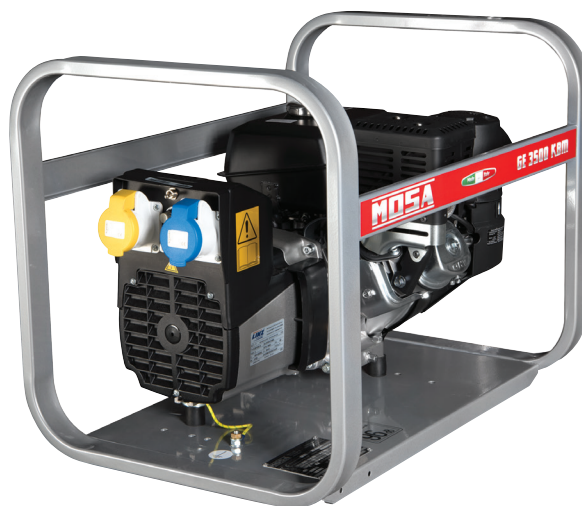

#### Optional

- Earthing kit
- Moving trolley CM8
- 230V only



Petrol Engine



Air Cooling



Manual Recoil



Engine Shut Down (Oil)



Sockets 230V & 110V

Order Code: 35.CJ6G5010