

Balancers

TECNA balancers offer versatility for a whole range of applications

It may be used for bench assembly line works and it may be suitably applied to small tools, industrial suspended welders and multiple screwdrivers etc.

The balancers are produced in conformity with the DIN 15112 directive thanks to their high structural technology and their compliance with the laws in force they are BG certified by the relevant German institute for their safe use in the working environment.

The new ATEX balancers are an expansion of our range that is certified and suitable for installation in potentially explosive areas.



1600mm wire

- 9311** 0.4 - 1 Kg
- 9312** 1 - 2 Kg
- 9313** 2 - 3 Kg




2000mm wire

- 9320** 1 - 2.5 Kg
- 9321** 2 - 4 Kg
- 9322** 4 - 6 Kg
- 9323** 6 - 8 Kg



2500mm wire

- 9336** 2 - 4 Kg
- 9337** 4 - 6 Kg
- 9338** 6 - 8 Kg
- 9339** 8 - 10 Kg
- 9340** 10 - 14 Kg

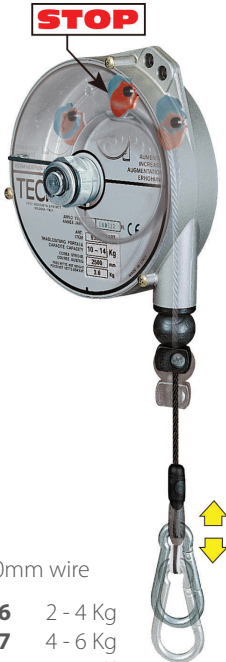

2500mm wire

- 9346** 2 - 4 Kg
- 9347** 4 - 6 Kg
- 9348** 8 - 10 Kg
- 9349** 10 - 14 Kg



2000mm wire

- 9354** 4 - 7 Kg
- 9355** 7 - 10 Kg
- 9356** 10 - 14 Kg
- 9357** 14 - 18 Kg
- 9358** 14 - 22 Kg
- 9359** 22 - 25 Kg



2000mm wire

- 9361** 10 - 15 Kg
- 9362** 15 - 20 Kg
- 9363** 20 - 25 Kg
- 9364** 25 - 30 Kg
- 9365** 30 - 35 Kg
- 9366** 35 - 45 Kg
- 9367** 45 - 55 Kg
- 9368** 55 - 65 Kg
- 9369** 65 - 75 Kg



2000mm wire

- 9370** 75 - 90 Kg
- 9371** 90 - 105 Kg