

BASTION

EDGE-LIT TP(b) PANELS



Available in a wide range of sizes and lumen output options, the popular Bastion edge-lit panels are ideal for projects where a balance of efficiency and cost are important.

Features

- TP(b) rated diffusers
- Shallow profile, only 9mm deep
- Flicker free driver
- 300 x 1200mm, 600 x 1200mm, 600 x 600mm & 300 x 600mm options
- Dimmable drivers & emergency conversion kits available to order separately




Specification

Material:	Body & Frame: Aluminium Diffuser: TP(b) Polypropylene
Colour Temperature:	3000K / 6000K / 4000K
Colour Finish:	RAL9016 White
CRI	Ra>80
LED Lifetime:	L70B50 50,000 Hrs
IP Rating:	IP20
IK Rating:	IK04
Working Temperature:	-20°C to 50°C
Power Factor:	0.9
Electrical Class:	Class II
Guarantee:	5 Years

Dimensions

Product Code	Dimensions
BLP6636	L: 595 x W: 595 x D: 9mm
BLP12336	L: 1195 x W: 295 x D: 9mm
BLP12660	L: 1195 x W: 595 x D: 9mm
BLP6326	L: 595 x W: 295 x D: 9mm

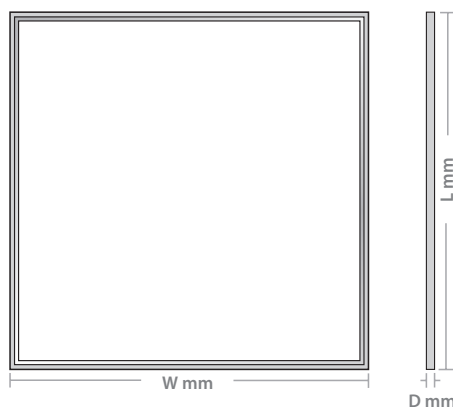


Product Code	Description	Wattage	Colour Temperature	Lumen Output	Efficacy	Barcodes	Net Weight (kg)
BLP6636-30	Bastion 600mm x 600mm TP(b)	36W	3000K	3240 lm	90 lm/W	5055807619851	2.06
BLP6636-40	Bastion 600mm x 600mm TP(b)	36W	4000K	3240 lm	90 lm/W	5055807619868	2.06
BLP6636-60	Bastion 600mm x 600mm TP(b)	36W	6000K	3240 lm	90 lm/W	5055807619875	2.06
BLP12336-30	Bastion 300mm x 1200mm TP(b)	36W	3000K	3240 lm	90 lm/W	5055807620581	2.2
BLP12336-40	Bastion 300mm x 1200mm TP(b)	36W	4000K	3240 lm	90 lm/W	5055807619813	2.2
BLP12336-60	Bastion 300mm x 1200mm TP(b)	36W	6000K	3240 lm	90 lm/W	5055807619820	2.2
BLP12660-30	Bastion 600mm x 1200mm TP(b)	60W	3000K	5400 lm	90 lm/W	5055807620598	4.2
BLP12660-40	Bastion 600mm x 1200mm TP(b)	60W	4000K	5400 lm	90 lm/W	5055807619837	4.2
BLP12660-60	Bastion 600mm x 1200mm TP(b)	60W	6000K	5400 lm	90 lm/W	5055807619844	4.2
BLP6326-30	Bastion 300mm x 600mm TP(b)	26W	3000K	2340 lm	90 lm/W	5055807620604	1.2
BLP6326-40	Bastion 300mm x 600mm TP(b)	26W	4000K	2340 lm	90 lm/W	5055807620499	1.2
BLP6326-60	Bastion 300mm x 600mm TP(b)	26W	6000K	2340 lm	90 lm/W	5055807620505	1.2

Product Code	Description	Emergency Battery Type	Emergency
TITAN/KIT	Emergency Conversion Kit	LiFeP04	5055807623537
EMLEDKIT3	Emergency Conversion Kit	Ni-Cd	5055807619554

Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	2.5	1.5	1.5	1.5	2.5
26W	9	15	20	24	30	15	20	24	30
36W	6	11	14	17	22	11	14	17	22
60W	4	6	8	10	13	6	8	10	13


Light Distribution Curve

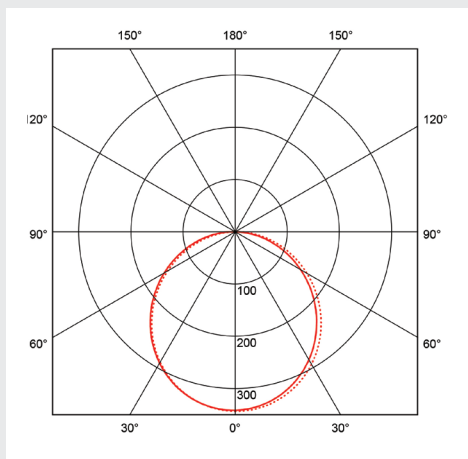

UK
CA



CE



www.redarrowelectrical.co.uk