



Light reinforced angle brackets are used to assemble small structural joinery for internal and external applications.

### FEATURES





### Material

- Pre-galvanised mild steel.

### Benefits

- Multiple applications.



## APPLICATIONS

### Header member



- **Supporting member:** solid wood, composite lumber, glued-laminated wood, triangular trusses, profiles, etc.
- **Supported member:** wood, concrete, steel, etc.

### For Use With

- Interior fittings.
- Furniture.
- Small frames, etc.

TECHNICAL DATA

Product Dimensions



References	Product Dimensions [mm]				Holes Flange A				Holes Flange B				
	A	B	C	t	Ø5	Ø11	Ø10x20	Ø12x20	Ø5	Ø11	Ø10x30	Ø10x42	Ø10x52
EA444/2C5	40	40	40	2	3	-	-	-	3	-	-	-	-
EA446/2C5D	40	40	60	2	4	-	-	-	4	-	-	-	-
EA554/2C5	50	50	40	2	4	1	-	-	4	1	-	-	-
EA664/2C5D	60	60	40	2	6	-	1	-	6	-	1	-	-
EA756/2C5	50	70	60	2	4	-	-	1	6	-	-	1	-
EA1066/2,5	60	100	60	2.5	5	-	-	1	8	-	-	-	1

## INSTALLATION

### Fixing

#### **On wood:**

- 3.75 x 30mm square twist nail.
- CNA annular ring-shank nails 4.0 mm.
- CSA screw 5.0 mm.

#### **On concrete:**


- HIPC 6-40/10 drive anchors or HIPC 8-60/20.

#### **On metal:**

- Bolts.
- HR bolts.
- Rivets, etc.

### Installation

Use specified fasteners.

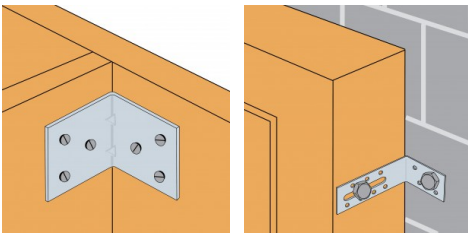

Wood to wood  
connection.

Timber to  
masonry  
connection